



FLEXION
INDUSTRIAL

HOSES FOR ALL INDUSTRIES





Flexion Industrial

Flexion Industrial is a trusted provider of various industrial & hydraulic hose solutions, supported by strong production partners and a robust supply infrastructure based in Lamone, Switzerland. Our portfolio includes industrial Rubber and PVC hoses as well as Hydraulic Hoses & fittings.

All products are engineered to meet international standards such as SAE, ISO, EN/ DIN etc. for durability, performance, and safety. With a focus on engineering precision and high-quality materials, Flexion Industrial delivers reliable, long-lasting solutions for modern industrial needs.



WATER



AIR GAS



OIL & PETROLEUM



WELDING



MATERIAL HANDLING

ADDRESS & LOCATION



c/ o Gianni ochsner SA Ecocentro Serta Via Cantonale 2,
6814 Lamone, Switzerland

Tel...: +41 91 945 43 85

Cell: +41 79 596 55 52

info@flexion-industrial.ch

www.flexion-industrial.ch





we recognize that the true value of various hose solutions lies not only in technical specifications, but also in application safety, system compatibility, and operational continuity.

With this perspective, our hoses are developed to meet a wide range of pressure, temperature classes, high abrasion resistance, connection standards, and industrial requirements. Designed to balance flexibility with mechanical strength, Flexion hoses help optimize system efficiency while reducing maintenance needs and downtime.

Through an engineering-driven product selection approach, application-focused guidance, and a reliable supply structure, Flexion Industrial delivers more than components — we provide long-term, dependable solution partnerships. In industries where hose-line systems are mission-critical, reliability and consistency remain at the core of everything we do.



FOOD



STEAM



HOT WATER



CHEMICAL



SEWER CLEANING

OUR PRODUCT FOCUS

Industrial Rubber Hoses

- Long length Hoses (LL)
- Mandrel Built Hoses (M)
(Delivery/Suction & Delivery)
- Customized Hoses
(Flanged, Smooth Cufft, Accordion etc.)

PVC Hoses

- PVC Braided Hoses
- PVC spiral Hoses
- PVC Steel Helix Hoses
- PVC Lay Flat Hoses

Hydraulic Hoses

- Wire Braided Hoses (W/B)
- Wire Spiral Hoses (W/S)
- Textil Braided Hoses
- Thermoplastic Hoses

Special Hoses

- Sewer Cleaning Hoses
- Data Center Hoses
- Push_Lok Hoses
- Air conditioning Hoses
- Dredging Hoses
- Manipulated Hoses



WATER HOSES

Water hoses are designed for the safe and efficient transfer of water in industrial and general applications.

Their durable construction provides resistance to pressure, abrasion, and environmental conditions, ensuring reliable performance in cooling systems, irrigation lines, and water transfer applications.

AIR-GAS HOSES

Flexion Air & Gas hoses are designed to ensure safe and efficient performance in industrial air and gas transfer applications.

Their durable construction provides resistance to pressure fluctuations, environmental conditions, and mechanical abrasion, making them suitable for pneumatic systems, gas distribution lines, and industrial facilities.



OIL & PETROLEUM HOSES

Flexion Petrol & Oil hoses are engineered for the safe and efficient transfer of petroleum-based fluids in demanding industrial environments.

Designed to withstand high pressure, temperature variations, and aggressive oils, these hoses ensure reliable performance in applications such as hydraulic systems, fuel transfer, lubrication lines, and industrial machinery.



WELDING HOSES

Flexion Welding Hoses are designed for the safe and reliable transfer of gases used in welding and cutting applications.

Engineered to withstand high temperatures, pressure variations, and harsh working conditions, these hoses are suitable for oxygen, acetylene, propane, and other industrial welding gases. machinery.





FOOD HOSES

Food hoses are designed for the hygienic and safe transfer of liquid and semi-liquid food products in the food and beverage industry.

Their food-grade inner lining, odorless and tasteless structure helps preserve product integrity while ensuring reliable performance in production processes.

MATERIAL HANDLING HOSES

Material handling hoses are designed for the safe and efficient transfer of abrasive, granular and bulk materials.

Their reinforced construction and abrasion-resistant inner lining ensure long service life and reliable performance when handling materials such as cement, sand, gravel and powders.



SEWER CLEANING HOSES

Sewer cleaning hoses are specially designed durable hoses for cleaning wastewater pipes, septic systems, and sewer lines. Made from high-pressure resistant materials, they ensure long-lasting performance.

Available in various diameters and lengths, they are compatible with different cleaning machines.

STEAM HOSES

Flexion Industrial steam hoses are specially designed to provide safe and durable performance under high temperature and pressure conditions.

Suitable for industrial boilers, production lines, and cleaning systems, these hoses are manufactured from long-lasting materials and are available in various diameters and lengths for versatile applications.





CHEMICAL HOSES

Chemical hoses are engineered for the safe transfer of aggressive and hazardous fluids. Flexion Chemical hoses are designed to maintain structural integrity even when exposed to acids, solvents, and a wide range of chemical substances.

Developed with a strong focus on chemical resistance, controlled flow, and operational safety, these hoses provide a reliable connection in process lines and industrial facilities.

HYDRAULIC HOSES

Hydraulic hoses are essential system components that enable the controlled transmission of power. Flexion hydraulic hoses are developed to support stable, continuous, and safe operation of pressure-driven mechanisms.

Designed with a focus on flow stability, vibration absorption, and system integrity, these hoses ensure operational continuity across a wide range of applications, from industrial machinery to mobile equipment.



Quality & Manufacturing Process

Flexion hoses are designed and manufactured in accordance with the durability, safety, and performance requirements of industrial applications.

The production process utilizes high-quality raw materials, multi-layer construction systems, and reinforced components. Inner layers ensure fluid compatibility and leak resistance, reinforcement layers provide pressure strength, and outer layers protect against abrasion, environmental conditions, and mechanical stress.

Each product undergoes strict quality control and testing throughout the manufacturing process to ensure long service life, reliability, and safe operation.



Industrial Rubber & Special Hoses



WATER HOSES 9



SEWER &
ROAD CLEANING 10



FIRE FIGHTING 10



AIR-GAS 11



WELDING 12



HOT WATER 12



STEAM 13



HOT AIR BLOWER 13



MATERIAL HANDLING 13



FOOD 15



ABRASIVE FOOD 16



Hydraulic Hoses & PVC Hoses



OIL PETROLEUM	16
PETROLEUM DISPENSING	18



CHEMICAL	19
CABLE PROTECTION	20



STEEL MILL	20
OFFSHORE	21



HYDRAULIC HOSES	23
THERMOPLASTIC HOSES	28




PVC HOSES	29
-----------------	----





• **Industrial Rubber Hoses**

• **Special Hoses**

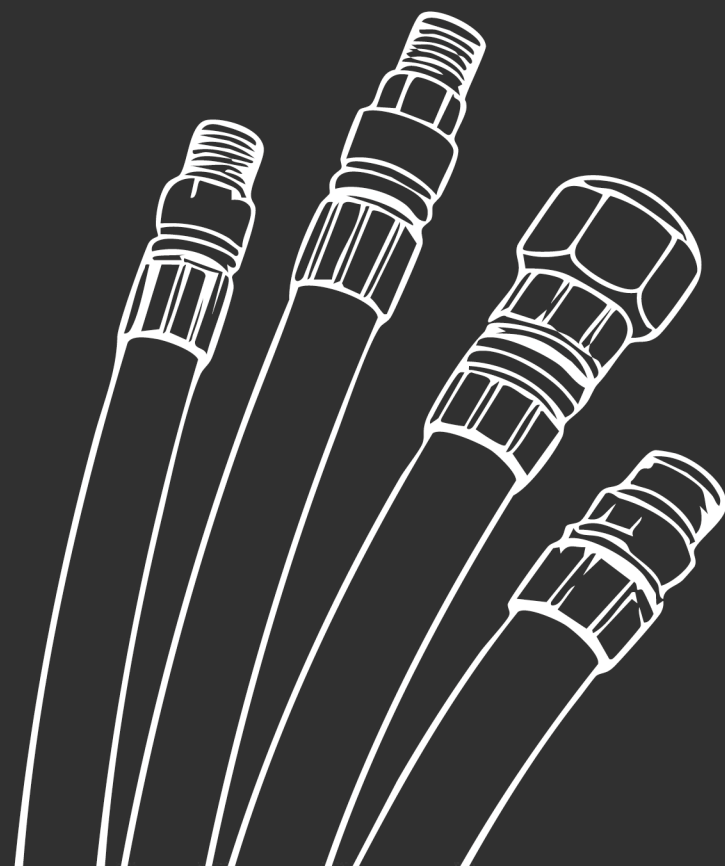




WATER HOSES

AQUADUCT SMOOTH

WATER

CTS11110

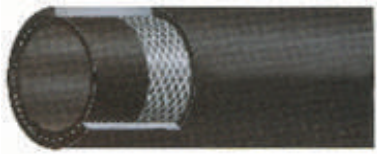

Natural and synthetic rubber tube, for gardening and general water discharge services.

I.D. from 1/4 "to 1" **W.P.** 10 BAR

RIV-6

LOW PRESSURE WATER

MFA11007



Natural and synthetic rubber tube, for gardening and general water discharge services

I.D. from 3/8" to 10" **W.P.** 7 BAR

RIV-10

MEDIUM PRESSURE WATER

MFA11110




Natural and synthetic rubber tube. for industrial and construction services, which require medium pressure application .

I.D. from 3/8 "to 10" **W.P.** 10 BAR

RIV-FLAT

LAYFLAT WATER

MFA13105

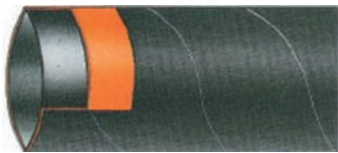

Natural and synthetic rubber tube, for discharge of water in agricultural and industrial applications.

I.D. from 2 "to 20" **W.P.** 5 BAR

RIV-STREAM 10 RIV-STREAM 20

HIGH PRESSURE LAYFLAT WATER

MFA13610
MFA13820



Natural and synthetic rubber tube, for discharge of water in agricultural and industrial applications.

I.D. from 2 "to 20" **W.P.** 10 and 20 BAR

RIV-SD 10

WATER SUCTION AND DISCHARGE

MFA14107
MFA14110




Natural and synthetic rubber tube, for water suction and discharge in industrial and construction services.

I.D. from 3/4 "to 12" **W.P.** 7 and 10 BAR

RIV-SD 16

HEAVY DUTY WATER SUCTION
AND DISCHARGE

MFA14216

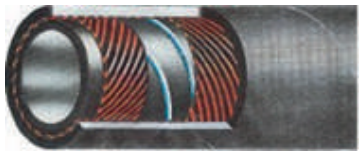

Natural and synthetic rubber tube, for water suction and discharge in industrial and construction services.

I.D. from 3/4 "to 12" **W.P.** 16 BAR

RIV-SDC 10

WATER SUCTION AND DISCHARGE
CORRUGATED

MFA12007



Natural and synthetic rubber tube, for water suction and delivery, in agricultural, industrial and construction applications.

I.D. from 1 "to 12" **W.P.** 3 BAR

RIV-SDFC 10

WATER SUCTION & DISCHARGE FLAT
CORRUGATED

MFA12510



Natural and synthetic rubber tube, for water suction and discharge in industrial and construction.

I.D. from 3/4 "to 6" **W.P.** 8 and 10 BAR

RIV-SDGR 10

WATER SUCTION AND DISCHARGE
CHANNELED

MFA1268
MFA12610



Natural and synthetic rubber tube, for water suction and discharge in industrial and construction applications.

I.D. from 3/4 "to 6" **W.P.** 8 and 10 BAR

TANK STREAM 25

TANK CLEATING HOSE

MFA11525



Detergent resistant EPDM rubber tube. for tank cleaning applications.

I.D. from 1/2 "to 2" **W.P.** 25 BAR

ALPIN PRESS 40

ARTIFICIAL SNOW

MFA12510



SBR/NBR rubber tube, for artificial snow equipments.

I.D. from 1/2 "to 2" **W.P.** 40 BAR



SEWER & ROAD CLEANING

TB CITYJET-200

SEWER JETTING

BTB200200




Special synthetic rubber tube, for high pressure water cleaning and rinsing of sewage systems.

I.D. from 1/2 "to 1 1/2" **W.P.** 200 BAR

SWB CITYJET-200

SEWER JETTING

STB165200

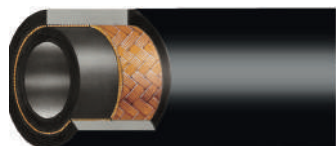

Special PE tube, for high pressure water cleaning and rinsing of sewage systems.

I.D. from 1/2" to 1 1/4 " **W.P.** 200 BAR

TB CITYJET-250

SEWER JETTING

BTB250250



Special synthetic rubber tube, for high pressure water cleaning and rinsing of sewage systems.

I.D. from 1/2 "to 1 1/2" **W.P.** 250 BAR

TPU CITYJET-200

SEWER JETTING

STB166250




Special PE tube, for high pressure water cleaning and rinsing of sewage systems.

I.D. from 1/2 "to 1/4" **W.P.** 250 BAR

TPU CITYJET-250

SEWER JETTING

HWB250250

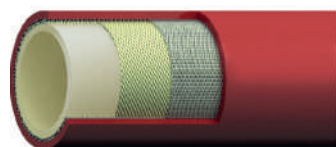

Special synthetic rubber tube, for high pressure water cleaning and rinsing of sewage systems.

I.D. from 1/2 "to 5/8" **W.P.** 250 BAR

SWEEP FLEX

SWEEPER HOSE

MFA24400



Abrasion resistant natural rubber tube, for used on street cleaning machines. extremely flexible.

I.D. from 6 "to 14"

SUPERNOVA

VACUUM TRUCK HOSE

MFA14506



Oil and abrasion resistant black antistatic NBR tube, for suction and cleaning of sewage systems.

I.D. from 4 "to 6" **W.P.** 6 BAR

IGLO/C

S.E. MEDIUM DUTY SÜCT & DEL (-30°C)

TEH2200




Strong, flexible and smooth special superelast1c tube, for medium duty suet. and delivery of water, salt water, light chemical, liquids. Especially for use 1n very cold climates.

I.D. from 3/4 "to 8"

HIEMES/C

S.E. MEDIUM DUTY SÜCT & DEL (-40 C)

TEH3200

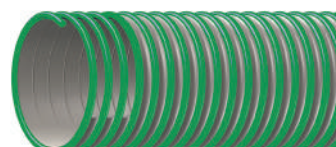

Strong, flexible and smooth special superelast1c tube, for medium duty suet. and delivery of water, salt water, light chemical, liquids. Esp. for use 1n extremely cold climates, applications.

I.D. from 3/4 "to 8"



FIRE FIGHTING

FIRE GUARD

FIRE EXTINGUISHER

CTS586200



Special synthetic rubber tube, for fire extinguishers.

I.D. from 3/8 "to 5/8" **W.P.** 20 BAR

PROMETHEUS-15

FIRE FIGHTING HOSE

MFA58115



Natural and synthetic rubber tube, for fire fighting vehicles.

I.D. from 1/2 "to 1 1/4" **W.P.** 15 BAR

PROMETHEUS-40

FIRE FIGHTING HOSE

MFA58440




Natural and synthetic rubber tube, for fire fighting vehicles.

I.D. from 1/2 "to 1/4" **W.P.** 40 BAR

REELMASTER

THERMORUB FIRE REEL

STS7107

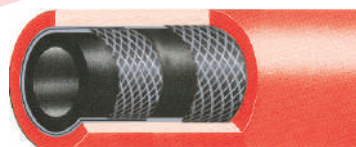


Special thermorub tube, for fire fighting applications in fire reels.

I.D. from 1/2 "to 1 1/4" **W.P.** 7 TO 20 BAR

N7-CO₂

TEXTILE BRAIDED CO₂

BTB541100

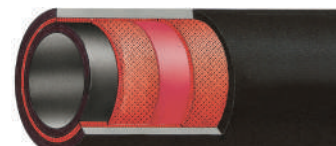

CO₂ resistant special synthetic rubber tube, for high pressure transfer of CO₂ .

I.D. from 9/32 "to 5/16" **W.P.** 6 BAR



AEREX-10

LIGHT DUTY AIR

CTS08110



Oil-mist resistant natural and synthetic rubber tube, for pneumatic equipments and tools.

I.D. from 3/16 "to 1" **W.P.** 10 BAR

AEREX-20

MEDIUM DUTY AIR

CTS08420



Oil-mist resistant natural and synthetic rubber tube, for medium duty services for air and pneumatic tools specially in mines, quarries and constructions.

I.D. from 1/4" to 1" **W.P.** 20 BAR

AEREX-20 A/S

MEDIUM DUTY AIR- ANTISTATIC

CTS08420



Oil-mist resistant natural and synthetic antistatic rubber tube, for medium duty services for air and pneumatic tools specially in mines, quarries and constructions.

I.D. from 1/4 "to 1" **W.P.** 20 BAR

AEREXMULTI-20

MULTIPURPOSE

CTS22520




Special synthetic rubber tube, for conveying air, oil, cold/hot water.

I.D. from 1/4 "to 1" **W.P.** 10 AND 20 BAR

OPTIMUM-20

MULTIPURPOSE

CTS22510
CTS22520

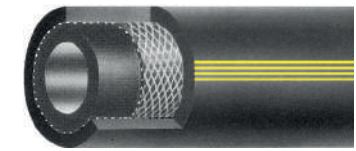

EPDM rubber tube, for conveying air, oil, cold/hot water and non aggressive chemicals.

I.D. from 1/4 "to 1" **W.P.** 10 AND 20 BAR

BORA-10

LIGHT DUTY AIR

MFA08110




Oil-mist resistant natural and synthetic rubber tube, for pneumatic equipments and tools .

I.D. from 1/2 "to 4" **W.P.** 10 BAR

BORA-20

MEDIUM DUTY AIR

MFA08420

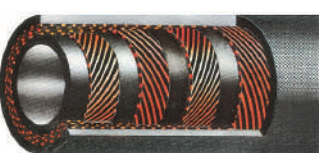

Oil-mist resistant natural and synthetic rubber tube, for medium duty services for air and pneumatic tools specially in mines, quarries and constructions.

I.D. from 1/2 "to 4" **W.P.** 20 BAR

BORA-25

HEAVY DUTY AIR

MFA22520



Oil-mist resistant natural and synthetic rubber tube, for heavy duty services for air and pneumatic tools specially in mines, quarries and constructions .

I.D. from 1/2 "to 4" **W.P.** 25 BAR

NOTOS-40

STEEL WIRE REINFORCED AIR

UWS20540



Synthetic NBR tube with steel wire reinforced, resistant to oil-mist mixed air and inert fluids, for high pressure air transfer in mines.

I.D. from 1/2 "to 4" **W.P.** 40 BAR

UZAY

DUST AND AIR SUCTION

MFA24000




Natural and synthetic rubber tube, for suction and delivery of air, dust, grain, powder etc.

I.D. from 1" to 12 "

MAGMA 1SN

DIN-EN 853 1SN (+135 C)/ HIGH TEMP.
STEEL WIRE BRAIDED

HWB31300

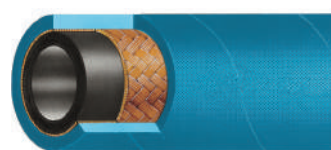

High temperature hydraulic oil resistant special synthetic rubber tube for low-medium pressure hydraulic systems in industry and mining where operating temperatures are up to 150°C

I.D. from 3/16 "to 3"

MAGMA 2SN

DIN-EN 853 2SN (+135 C)/ HIGH TEMP.
STEEL WIRE BRAIDED

HWB32300



High temperature hydraulic oil resistant special synthetic rubber tube for medium-high pressure hydraulic systems in industry and mining where operating temperatures are up to 150°C

I.D. from 3/16 "to 3"

MAGMA R5

SAE J517 100 R5 (+135 C)/ HIGH TEMP.
TEXTILE AND STEEL WIRE BRAIDED

HWB35100




High temperature hydraulic oil resistant special synthetic rubber tube for low-medium pressure hydraulic systems in industry and mining where operating temperatures are up to 150°C

I.D. from 3/16 "to 3"

MAGMA R6

SAE J517 100 R6 (+135 C)/ HIGH TEMP.
TEXTILE BRAIDED

BTB36200

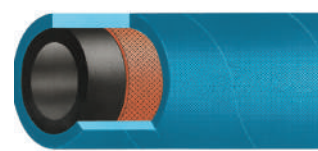

High temperature hydraulic oil resistant special synthetic rubber tube for low pressure hydraulic control lines where operating temperatures are up to 150°C

I.D. from 3/16 "to 1"

N7-20

NITROGEN HOSE

MFA22520



Nitrogen resistant natural and synthetic rubber tube, for transfer of nitrogen.

I.D. from 1/2 "to 4" **W.P.** 20 BAR



WELDING

FERROCON-EN 559

WELDING
(OXYGEN - ACETYLENE)

CTS21020



Black smooth synthetic rubber tube, resistant to oxygen and acetylene, for industrial welding with oxygen or acetylene.

I.D. from 1/4 "to 1/2" W.P. 20 BAR

FERROCON TWIN-EN 559

WELDING (OXYGEN AND ACETYLENE)

CTS21320




Black smooth synthetic rubber tube, resistant to oxygen and acetylene, for industrial welding with oxygen or acetylene .

I.D. from 3/16" to 1/2" W.P. 20 BAR

FERROCON-ASTM 542

WELDING
(OXYGEN - ACETYLENE)

MFA21125

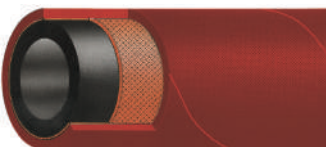


Black smooth synthetic rubber tube, resistant to oxygen and acetylene, for industrial welding with oxygen or acetylene.

I.D. from 5/16 "to 1 1/2 W.P. 25 BAR

GASPRESS

LPG WELDING

CTS27020

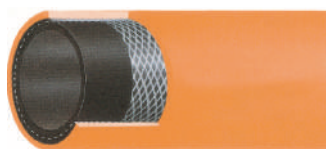


Black, LPG and propane resistant special synthetic rubber tube, for welding with LPG.

I.D. from 1/4 "to 1/2" W.P. 20 BAR

TORCH LP

WELDING TORCH HOSE

CTS16007

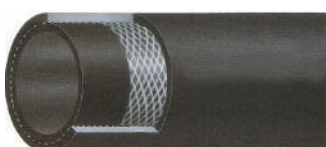

Non conductive special synthetic rubber tube, for delivery of water and cooling liquids suitable for welding torches.

I.D. from 5/16 "to 3/8" W.P. 7 BAR



HOT WATER

CARSUN L/L

CAR HEATER - RADIATOR

CTS16005




EPDM rubber tube, for delivery of hot water with very light chemical content in industrial applications.

I.D. from 1/4 "to 1" W.P. 5 BAR

HEATERMASTER

WELDING TORCH HOSE

CTS16210

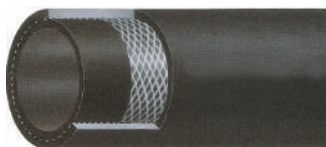

EPDM rubber tube, for delivery of hot water with very light chemical content in industrial applications.

I.D. from 3/8 "to 1" W.P. 10 BAR

RADMASTER

RADIATOR

MFA16204



Heat and anti-freeze resistant EPDM rubber tube, for cooling systems of automotive and stationary engines.

I.D. from 1/2 "to 4" W.P. 4 BAR

RADMASTER-10

HOT WATER

MFA16010




EPDM rubber tube, for hot water delivery in industrial applications.

I.D. from 1/2" to 8" W.P. 10 BAR

RADMASTER SD/10

HOT WATER S&D

MFA16310

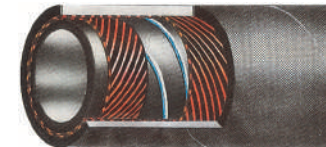

EPDM rubber tube, for hot water suction and delivery in industrial applications.

I.D. from 3/4 "to 4" W.P. 10 BAR

RADMASTER SDC

HOT WATER S&D - CORRUGATED

MFA16410




EPDM rubber tube, for hot water suction and delivery in industrial applications.

I.D. from 1 "to 4" W.P. 10 BAR

RADMASTER SDFC

HOT WATER S&D - FLAT CORRUGATED

MFA16F10

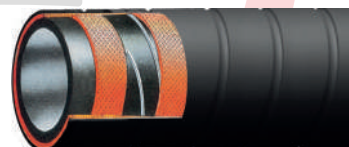

EPDM rubber tube, for hot water suction and delivery in industrial applications.

I.D. from 3/4 "to 6" W.P. 10 BAR

RADMASTER GR

HOT WATER S&D - CHanneled

MFA16K10




EPDM rubber tube, for hot water suction and delivery in industrial applications.

I.D. from 3/4 "to 6" W.P. 8 and 10 BAR

RADMASTER GF

GLASS FIBRE COVER HOT WATER

MFA16C10

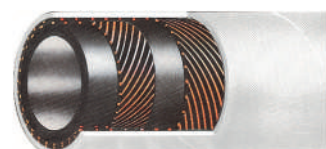


EPDM rubber tube, for discharge of cooling water in steel mills, foundries etc.


I.D. from 3/8 "to 10" W.P. 10 BAR

F STEAM


VAPORFLEX T170 TEXTILE STEAM

MFA51107

 EPM rubber tube, resistant to saturated steam, for general saturated steam services.
I.D. from 3/8 "to 4" **W.P.** 7 BAR

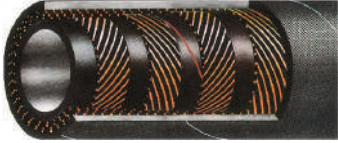
VAPORFLEX ISO 6134 1-A TEXTILE STEAM - ISO 6134-1A

MFA56006

 EPM rubber tube, resistant to saturated steam. for general saturated steam services.
I.D. from 1/2" to 4" **W.P.** 6 BAR


VAPORFLEX 6134 1-B OIL RESISTANT COVER TEXTILE STEAM - ISO 6134-1B Oil Resistant cover

MFA56106

 EPM rubber tube, resistant to saturated steam, for general saturated steam services .
I.D. from 1/2 "to" 4" **W.P.** 6BAR


VAPORFLEX PRO W210 STEEL WIRE REINFORCED STEAM 200°C

UWS51317

 EPM rubber tube, resistant to saturated steam, for general saturated steam services in chemical plant, steel mills, refineries, shipyards and all industries.
I.D. from 1/2 "to" 4" **W.P.** 17 BAR


VAPORFLEX PRO W210 ISO 6134 2-A STEEL WIRE REINFORCED STEAM 210°C - ISO 6134-2A

UWS56318

 EPM rubber tube, resistant to saturated steam, for general saturated steam services in chemical plant, steel mills, refineries, shipyards and all industries.
I.D. from 1/2 "to" 4" **W.P.** 17 BAR

VAPORFLEX PRO W210 ISO 6134-2B STEEL WIRE REINFORCED STEAM 210°C - ISO 6134-2B


UWS56418

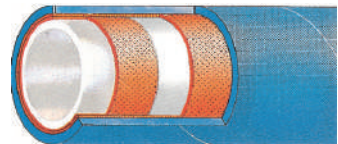 EPM rubber tube, resistant to saturated steam, for general saturated steam services in chemical plant, steel mills, refineries, shipyards and all industries.
I.D. from 1/2 "to" 4" **W.P.** 18 BAR

VAPORFLEX DSW DAIRY STEAM-WASH


MFA88107

 White special taste and odour free synthetic rubber tube, for hot water and steam cleaning in food processing plants (dairies, abattoirs).
I.D. from 3/8 "to 4" **W.P.** 7 BAR

F HOT AIR BLOWER

HAB/D 200°C HOT AIR BLOWER


MFA50710

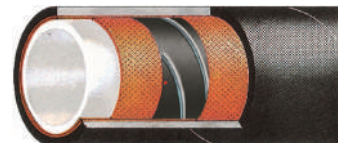 Heat resistant white EPDM rubber tube, for transfer of hot and dry air from compressor to tank truck.
I.D. from 1 "to 4" **W.P.** 10 BAR

HAB/SD 200°C HOT AIR BLOWER S&D


MFA50810

 Heat resistant white EPDM rubber tube, for transfer of hot and dry air from compressor to tank truck. Especially where reduced bending radius is required.
I.D. from 1 "to 4" **W.P.** 10 BAR

F MATERIAL HANDLING


MADMAX SANDBLAST $\le 60\text{mm}^3$

MFA71112

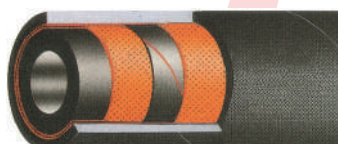 Abrasion resistant, antistatic natural rubber tube, for cleaning and blasting metal, stone and concrete surfaces.
I.D. from 1/2 "to 4" **W.P.** 12 BAR


MADMAX+X SANDBLAST $\le 35\text{mm}^3$

MFA71P12

 Abrasion resistant. antistatic natural rubber tube, for cleaning and blasting metal, stone and concrete surfaces.
I.D. from 1/2 "to 4" **W.P.** 12 BAR


MADMAX 2PL SANDBLAST 2 PLY $\le 60\text{mm}^3$

MFA71610

 Abrasion resistant, antistatic natural rubber tube, for cleaning and blasting metal, stone and concrete surfaces.
I.D. from 1/2 "to 2" **W.P.** 10 BAR

MADMAX 4PL SANDBLAST 4 PLY $\le 60\text{mm}^3$

MFA71710

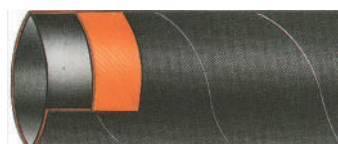 Abrasion resistant, antistatic natural rubber tube, for cleaning and blasting metal, stone and concretesurfaces.
I.D. from 1/2 "to 2" **W.P.** 10 BAR


SILOLINE CEMENT FLAT

MFA72005

 Abrasion resistant, antistatic natural rubber tube, for discharge of dry cement and abrasive powders for lames and silos.
I.D. from 2 "to 8" **W.P.** 5 BAR

ZEMENT-10

CEMENT DISCHARGE

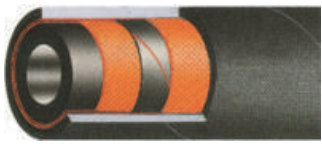MFA73110




Abrasion resistant, antistatic natural rubber tube, for discharge of dry bulk materials, sand, gravel, dry cement etc.

I.D. from 1" to 10" **W.P.** 10 BAR**ZEMENT SD-5**

CEMENT S&D 5 BAR

MFA74005

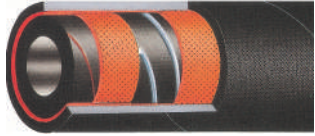

Abrasion resistant, antistatic natural rubber tube, for suction and discharge of dry bulk materials, sand, gravel, dry cement etc.

I.D. from 1" to 10" **W.P.** 5 BAR**ZEMENT SD-10**

CEMENT S&D BAR 10

MFA74110



Abrasion resistant, antistatic natural rubber tube, for suction and discharge of dry bulk materials, sand, gravel, dry cement etc.

I.D. from 1" to 10" **W.P.** 10 BAR**ZEMENT SDC**

CEMENT S&D - CORRUGATED

MFA74410




Abrasion resistant. antistatic natural rubber tube, for suction and discharge of dry bulk materials, sand, gravel, dry cement etc.

I.D. from 1" to 10" **W.P.** 10 BAR**ZEMENT GR**

CEMENT S&D - CHANNELED

MFA72610

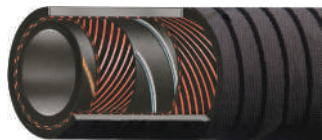

Abrasion resistant, antistatic natural rubber tube, for suction and discharge of dry bulk materials, sand, gravel, dry cement etc.

I.D. from 1" to 6" **W.P.** 10 BAR**BULMAT S&D**

BULK MATERIAL S&D HOSE

MFA74410



Abrasion resistant, antistatic natural rubber tube, for suction and discharge of dry bulk materials, sand, gravel, dry cement etc.

I.D. from 3 1/8" to 12" **W.P.** 10 BAR**MORTEL-40**

PLASTER&GROUT SPRAYING

MFA75140



Abrasion resistant, antistatic natural rubber tube, for spraying plaster, grout, sand, gypsum, ready mixed concrete.

I.D. from 3/4" to 5" **W.P.** 40 BAR**MORTEL 85**

PLASTER&GROUT SPRAYING

MFA75285



Abrasion resistant. antistatic natural rubber tube, for spraying plaster, grout, sand, gypsum, ready mixed concrete.

I.D. from 1" to 5" **W.P.** 85 BAR**BETLINE-85**STEEL WIRE REINFORCED
CONCRETE PUMPING

UWS76085




Abrasion resistant, antistatic natural and CBR rubber tube, for high pressure concrete pumping and placing used in the end of boom of concrete pump.

I.D. from 2" to 6" **W.P.** 85 BAR**SOLIDARE-12**

CONCRETE VIBRATION HOSE

MFA22710

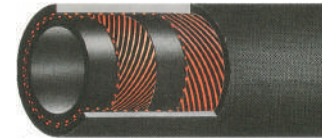

Special synthetic rubber tube, for utilized on submerged vibrators to prevent air bubbles in the concrete hqu1d projected by hand vibrating.

I.D. from 5/8" to 40mm" **W.P.** 10 BAR**DEMETER HD - PU**HEAVY DUTY ANTIABRASIVE
SUCTION & DELIVERY

TEH08000



Strong, flexible plasticized pvc with antiabrasive polyurethane tube, for suction and del. of water, slurries, dust and gravel etc. in abrasive applications.

I.D. from 40mm to 6"**PARA PURE**

ABRASION PARATUB

MFA07000




Abrasion resistant beige natural rubber tube, for discharge of abrasive materials, such as sand, gravel, cement, grain and powder without pressure.

I.D. from 1" to 20"**PARA PURE L**

ABRASION PARARUB

MFA79010

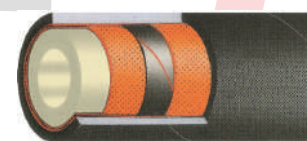


Abrasion resistant beige natural rubber tube, for discharge of abrasive materials, such as sand, gravel, cement, grain and powder etc.

I.D. from 1" to 10" **W.P.** 10 BAR**PARA PURE S&D**

ABRASION S&D PARARUB

MFA79110

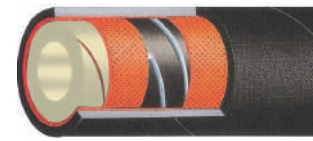

Abrasion resistant beige natural rubber tube, for suction and discharge of abrasive materials, such as sand, gravel, cement, grain and powder etc.

I.D. from 1" to 10" **W.P.** 10 BAR**PARA PURE SDC**ABRASION S&D PARARUB -
CORRUGATED

MFA79210



Abrasion resistant beige natural rubber tube, for suction and discharge of abrasive materials, such as sand, gravel, cement, grain and powder etc.

I.D. from 1" to 10" **W.P.** 10 BAR**PARA PURE GR**

ABRASION S&D PARARUB - CHANNELED

MFA79310



Abrasion resistant beige natural rubber tube, for suction and discharge of abrasive materials, such as sand, gravel, cement, grain and powder etc.

I.D. from 1" to 6" **W.P.** 10 BAR

MATHAND REFMATERIAL HANDLING RUBBER
BEADED END WITH FLANGE

MFA74210



Abrasion resistant antistatic natural rubber tube, for suction and discharge of abrasive materials.

I.D. from 3 "to 12" **W.P.** 8 and 10 BAR**CERVINUM D/6-10**


BEER & WINE DELIVERY

MFA80006
MFA80010

White non-toxic, taste and odour free, EPDM rubber tube, for delivery of beverages such as wine, liqueur, beer, fruit juices, mineral water etc.

I.D. from 3/4 "to 4" **W.P.** 6 or 10 BAR**CERVINUM SD/6-10**


BEER & WINE S&D

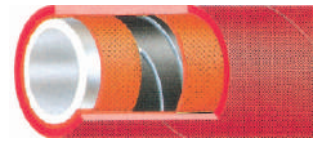MFA80106
MFA80110

White non-toxic, taste and odour free, EPDM rubber tube, for suction and delivery of beverages such as wine, liqueur, beer, fruit juices, mineral water etc.

I.D. from 3/4 "to 4" **W.P.** 6 or 10 BAR**CIBUS D/6-10**

FOODSTUFF DELIVERY

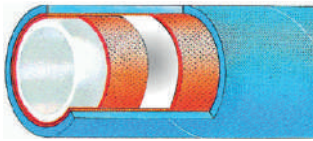MFA83106
MFA83110

White non-toxic, taste and odour free, natural rubber tube, for discharge of foodstuff, not recommended for oily or fatty foods.

I.D. from 3/4 "to 4" **W.P.** 6 or 10 BAR**CIBUS SD/6-10**

FOODSTUFF S&D

MFA84106
MFA84110

White non-toxic, taste and odour free, natural rubber tube, for suction and discharge of foodstuff, not recommended for oily or fatty foods

I.D. from 3/4 "to 4" **W.P.** 6 or 10 BAR**ARAK D-10**

FOODSTUFF DELIVERY

MFA80210
MFA80310

White non-toxic, taste and odour free, UHMW-PE tube, for discharge of foodstuff with high percentage of alcohol (up to 99°).

I.D. from 3/4 "to 4" **W.P.** 10 BAR**ARAK SD-10**

FOODSTUFF S&D


MFA80310



White non-toxic, taste and odour free, UHMW-PE tube, for suction and discharge of foodstuff with high percentage of alcohol (up to 99°).

I.D. from 3/4 "to 4" **W.P.** 10 BAR**ARAK SDFC-10**FOODSTUFF S&D - **FLAT CORRUGATED**

MFA80F10

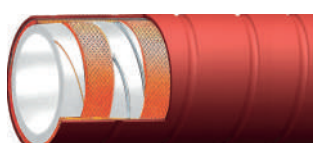

White non-toxic, taste and odour free, UHMW-PE tube, for suction and discharge of foodstuff with high percentage of alcohol (up to 99°).

I.D. from 3/4 "to 5" **W.P.** 10 BAR**F FOOD****PRIMAVERA D-10**

POTABLE WATER DELIVERY

MFA81110



White non-toxic, food quality, taste and odour free, special synthetic rubber tube, for discharge of potable water.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**PRIMAVERA SD/10**

POTABLE WATER S&D

MFA82110




White non-toxic, food quality, taste and odour free, special synthetic rubber tube, for suction and discharge of potable water.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**CASEUS D/6**

MILK DELIVERY

MFA82110

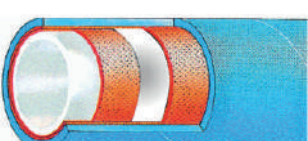

White non-toxic, taste and odour free, vegetable oil resistant, food grade NBR tube, for discharge of milk for use on tank truck or tank vagon.

I.D. from 3/4 "to 4" **W.P.** 6 BAR**CASEUS SD/6**

MILK SUCTION & DELIVERY

MFA86106




White non-toxic, taste and odour free, vegetable oil resistant, food grade NBR tube. for suet. and disch. of milk for use on tank truck or tank vagon.

I.D. from 3/4 "to 4" **W.P.** 6 BAR**BARI D/10**

MILK VEGETABLE OIL DELIVERY

MFA86106

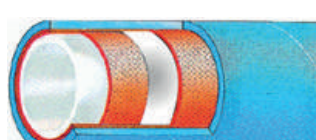

White non-toxic, taste and odour free, vegetable oil resistant, food grade NBR tube, for discharge of milk, vegetable oil and beverages.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**BARI SD/10**

MILK VEGETABLE OIL S&D

MFA87110



White non-toxic, taste and odour free, vegetable oil resistant, food grade NBR tube, for suet. and disch. of milk, vegetable oil and beverages.

I.D. from 3/4 "to 4" **W.P.** 10 BAR




ABRASIVE FOOD

CIBUS ABRA L

LIGHT DUTY BULK FOOD DELIVERY

MFA24805

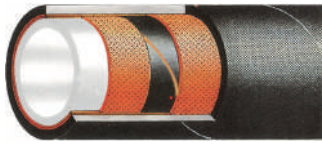

White, non-toxic, abrasion resistant natural rubber tube, for discharge of bulk abrasive materials.

I.D. from 2 "to 8" **W.P.** 5 BAR

CIBUS ABRA HD

HEAVY DUTY BULK FOOD DELIVERY

MFA24910




White, non-toxic, abrasion resistant natural rubber tube, for discharge of bulk abrasive products.

I.D. from 1" to 10" **W.P.** 10 BAR

CIBUS ABRA HD/SD

HEAVY DUTY BULK FOOD S&D

MFA84810

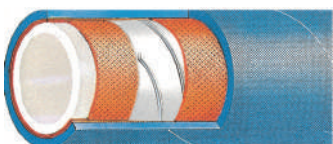

White, non-toxic, abrasion resistant natural rubber tube, for suction and discharge of bulk abrasive products.

I.D. from 1 "to 10" **W.P.** 10 BAR

CIBUS ABRA SDC

HEAVY DUTY BULK FOOD S&D - CORRUGATED

MFA84910



White, non-toxic, abrasion resistant natural rubber tube, for suction and discharge of bulk abrasive products

I.D. from 1 "to 10" **W.P.** 10 BAR

CIBUS ABRA SDFC

HEAVY DUTY BULK FOOD S&D - FLAT CORRUGATED

MFA84F10




White, non-toxic, abrasion resistant natural rubber tube, for suction and discharge of bulk abrasive products.

I.D. from 1 "to 8" **W.P.** 10 BAR

CIBUS ABRA GR

HEAVY DUTY BULK FOOD S&D - CHANNELED

MFA85010

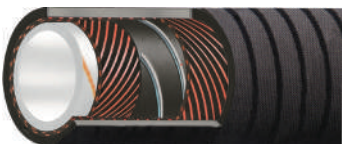

White, non-toxic, abrasion resistant natural rubber tube, for suction and discharge of bulk abrasive products.

I.D. from 1 "to 6" **W.P.** 10 BAR




OIL & PETROLEUM HOSES

ENERGY / 10

OIL DISCHARGE 10 BAR

MFA44110

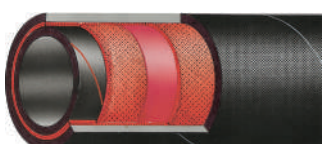


Oil and petrol resistant, black NBA tube, for delivery of petroleum products with aromatic content up to %50.

I.D. from 1 "to 6" **W.P.** 10 BAR

ENERGY SD/10

OIL S&D 10 BAR

MFA45110

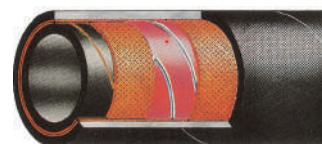

Oil and petrol resistant, black NBA tube, for suction and discharge of petroleum products with aromatic content up to %50.

I.D. from 1 "to 6" **W.P.** 10 BAR

ENERGY SDC/10

OIL S&D 10 BAR - CORRUGATED

MFA45410



Oil and petrol resistant, black NBA tube, for suction and discharge of petroleum products with aromatic

I.D. from 3/4" to 6 " **W.P.** 10 BAR

ENERGY SDFC/10

OIL S&D 10 BAR - FLAT CORRUGATED

MFA45F10



Oil and petrol resistant, black NBA tube, for suction and discharge of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 8" **W.P.** 10 BAR

ENERGY GR/10

OIL S&D 10 BAR - CHANNELED

MFA45610



Oil and petrol resistant. black NBA tube, for suction and discharge of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 6" **W.P.** 10 BAR

ENERGY/16

OIL DISCHARGE 16 BAR

MFA44116




Oil and petrol resistant, black NBA tube, for delivery of petroleum products with aromatic content up to %50.

I.D. from 1 "to 6" **W.P.** 16 BAR

ENERGY SD/16

OIL S&D 16 BAR

MFA45116

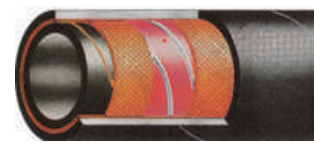

Oil and petrol resistant, black NBA tube, for suction and discharge of petroleum products with aromatic

I.D. from 1 "to 6" **W.P.** 16 BAR

ENERGY PLUS D/16

OIL DISCHARGE 16 BAR - EN 1360 TYPE 1

MFA44116




Oil and petrol resistant, black NBA tube, for delivery of petroleum products with aromatic content up to %50.

I.D. from 1/2 "to 1 9/16" **W.P.** 16 BAR

ENERGY PLUS SD/16

OIL S&D 16 BAR - EN 1360 TYPE 2

MFA45116

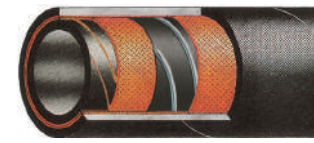

Oil and petrol resistant, black NBA tube, for suction and discharge of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 1 9/16" **W.P.** 16 BAR

ENERGY LINE D/16OIL DISCHARGE 16 BAR -
EN 1761 TYPE D


MFA44S16



Oil and petrol resistant, black NBA tube, for delivery of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 6" **W.P.** 16 BAR**ENERGY LINE SD/16**OIL S&D 16 BAR -
EN 1761 TYPE SD

MFA45S16

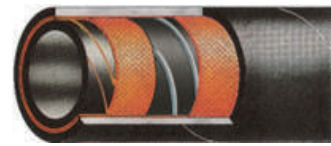

Oil and petrol resistant, black NBA tube, for suction and discharge of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 6" **W.P.** 16 BAR**ENERGY-EN 12115 /D16**OIL DISCHARGE 16 BAR -
EN 12115 TYPE D

MFA44716



Oil and petrol resistant, conductive NBA tube, for delivery of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 4" **W.P.** 16 BAR**ENERGY-EN 12115 /SD16**OIL S&D 16 BAR -
EN 12115 TYPE SD

MFA44816



Oil and petrol resistant, conductive NBA tube, for suction and discharge of petroleum products with aromatic content up to %50.

I.D. from 3/4 "to 4" **W.P.** 16 BAR**HYDROTEXT R4**

TEXTILE HYDRAULIC R4

MFA34100



Hydraulic oil resistant special NBA tube, for use in oil return lines of hydraulic systems of industrial and agricultural applications.

I.D. from 3/4 "to 4"**HYDROTEXT R4 ECO**

TEXTILE HYDRAULIC R4E

MFA34E00



Hydraulic oil resistant special synthetic rubber tube, for use in oil return lines of hydraulic systems of industrial and agricultural applications.

I.D. from 3/4 "to 4"**HYDROTEXT R4-FX**

X-FLEXIBILITY / TEXTILE BRAID R4-X

UTB34F00




Hydraulic oil resistant special NBA tube, for use in oil return lines of hydraulic systems of industrial and agricultural applications.

I.D. from 3/4 "to 4"**MAGMA R4**

TEXTILE HYDRAULIC R4 - HIGH TEMP.


UTB34100

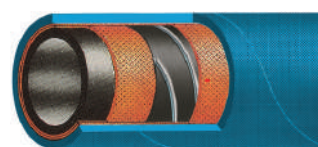

High temperature hydraulic oil resistant special synthetic rubber tube for use in oil return lines of hydraulic systems at industrial and agricultural applications.

I.D. from 3/4 "to 4"**PORTSUB**


DOCK OIL - EN 1765 TYPE S

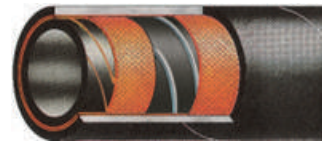MFA45910
MFA46015

Oil and petrol resistant, NBA tube, for suction and discharge of petroleum products with aromatic content up to 50% from tankers and barges bunkering services.

I.D. from 4 "to 10" **W.P.** 10 and 15 BAR**PORTSUB - S10**SWAGED FLANGES -
EN 1765 TYPE S10

MFA45910

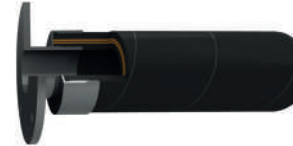

Oil and petrol resistant NBR tube, for suction and discharge of petroleum products with aromatic content up to 50% from tankers and barges bunkering services and industrial applications.

I.D. from 2" to 8" **W.P.** 10 BAR**PORTSUB - S10**BUILT-IN FLANGES -
EN 1765 TYPE S10

MFA41S10



Oil and petrol resistant NBR tube, for suction and discharge of petroleum products with aromatic content up to 50% from tankers and barges bunkering services and industrial applications.

I.D. from 2 "to 16" **W.P.** 10 BAR**PORTSUB - S15**SWAGED FLANGES -
EN 1765 TYPE S15

MFA46015



Oil and petrol resistant NBR tube, for suction and discharge of petroleum products with aromatic content up to 50% from ship to ship or from ship to dock.

I.D. from 2 "to 8" **W.P.** 15 BAR**PORTSUB - S15**BUILT-IN FLANGES -
EN 1765 TYPE S15

MFA41715



Oil and petrol resistant NBR rubber. for suction and discharge of petroleum products with aromatic content up to 50% from ship to ship or from ship to dock.

I.D. from 2 "to 16" **W.P.** 15 BAR**ROADGUARD**


ASPHALT S&D

MFA40118
MFA40110

Heat resistant. special synthetic acrylic rubber tube, for suction and discharge of tar and hot asphalt on tank trucks & tank cars etc. in road constructions up to 180°C.

I.D. from 1 "to 6" **W.P.** 10 and 18 BAR**EAGLE - B**AIRCRAFT REFUELING -
EN 1361 TYPE B


MFA49520

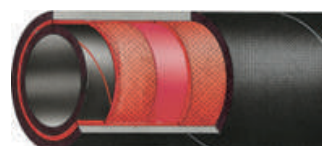

Aviation gasolines and jet fuels resistant, conductive NBR tube. for the ground refueling of aircrafts having an aromatic content up to 50%.

I.D. from 3/4 "to 4" **W.P.** 20 BAR**EAGLE-C**AIRCRAFT REFUELING -
EN 1361 TYPE C

MFA49420

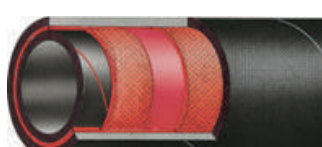


Aviation gasolines and jet fuels resistant, conductive NBR tube, for the ground refueling of aircrafts having an aromatic content up to 50%.

I.D. from 3/4 "to 4" **W.P.** 20 BAR

EAGLE-E

AIRCRAFT REFUELING S&D -
EN 1361 TYPE E

MFA49620

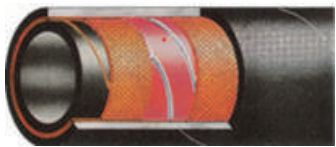

Aviation gasolines and jet fuels resistant. conductive NBR tube, for the ground refueling and fuel discharging of aircrafts having an aromatic content up to 50%.

I.D. from 3/4 "to 4" **W.P.** 20 BAR

LPG FL/D

LPG DISCHARGE-Ω -
EN 1761 TYPE SD

MFA27820
MFA27D25



LPG resistant, conductive black NBR tube, for delivery of LPG.

I.D. from 1/2 "to 4" **W.P.** 25 BAR

LPG FL/SD

LPG S&D-Ω -
EN 1762

MFA27925
MFA27S25




LPG resistant, conductive black NBR tube, for suction and delivery of LPG.

I.D. from 1/2 "to 4" **W.P.** 25 BAR

OCULAR R110

RUBBER HOSE AUTOGAS -
ECE R 110

CTS28545

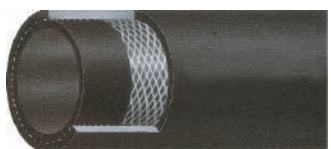

CNG resistant special smooth, synthetic rubber tube, for discharge of CNG in automotive systems.

I.D. from 4mm to 19mm **W.P.** 4.5 BAR

OCULAR 67

RUBBER HOSE AUTOGAS - ECE R 67

CTS28545




LPG resistant special smooth, synthetic rubber tube, for discharge of LPG in automotive systems.

I.D. from 4mm to 19mm **W.P.** 4.5 BAR

OPURE NBR

OIL NITRILE TUBE

CPT02000

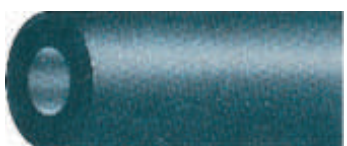


Oil and fuel resistant nitrile rubber. for oil discharge services.

I.D. from 3.2mm to 19mm

CARTEXT/10NL - 20 NL

TEXTILE REINFORCED OIL

CTS44510
CTS44520

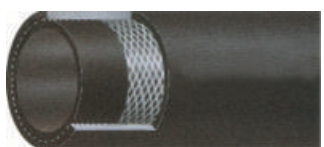

Fuel and oil resistant, smooth NBR tube, for delivery of fuels in internal combustion engines for lubrication and greasing services.

I.D. from 1/4 "to 1" **W.P.** 10 and 20 BAR

CARTEXT TYPE-B

OIL - DIN 73379 TYPE B

BTB47110



Fuel and oil resistant NBR tube, for delivery of oil, fuel oil, gasoline etc.

I.D. from 3.2mm to 19mm **W.P.** 10 BAR

ENERGY - 1A

OIL - DIN 73379 TYPE 1 A

CTS46110



Fuel and oil resistant smooth NBR tube, for delivery of fuels in internal combustion engines, for lubrication and greasing services. and industrial applications.

I.D. from 3.5mm to 16mm **W.P.** 10 BAR

ENERGY - 2A

OIL - DIN 73379 TYPE 1 A

CTS46210



Fuel and oil resistant smooth NBR tube, for delivery of fuels in internal combustion engines, for lubrication and greasing services.

I.D. from 3.5mm to 16mm **W.P.** 10 BAR

ENERGY - 2B

OIL - DIN 73379 TYPE 2 B

CTS46310



Fuel and oil resistant smooth NBR tube, for delivery of fuels in internal combustion engines, for lubrication and greasing services.

I.D. from 3.5mm to 16mm **W.P.** 10 BAR

ENERGY WB

GALVANIZED WIRE BRAIDED OIL

BWB48125



Fuel and oil resistant NBR tube with galvanised wire braided cover, for delivery of transmission oil, fuel oil, gasoline etc.

I.D. from 5mm to 25mm

F PETROLEUM DISPENSING

ENGUN / L PLUS

PETROL PUMP -30°C

BTB44116



Oil, gasoline and diesel resistant smooth, black, nitrile rubber tube, for all types of gasoline dispensing applications. (regular, premium gasoline and diesel).

I.D. from 1/2 "to 1" **W.P.** 16 BAR

ENGUN / L PLUS

PETROL PUMP^U L-54°C

BTB44U16



Oil, gasoline and diesel resistant smooth, black, nitrile rubber tube, for all types of gasoline dispensing applications. (regular, premium gasoline and diesel).

I.D. from 1/2 "to 1"

ENGUN SWB

PETROL PUMP STEEL WIRE
BRAIDED -30°C

HWB43016



Oil, gasoline and diesel resistant, smooth black nitrile rubber tube, for all types of gasoline dispensing applications. (regular, premium gasoline and diesel).

I.D. from 1/2 "to 1" **W.P.** 16 BAR

ENGUN SWB 54PETROL PUMP STEEL WIRE BRAIDED
UL -54°C

HWB43U16




Oil, gasoline and diesel resistant, smooth black nitrile rubber tube, for all types of gasoline dispensing applications. (regular, premium gasoline and diesel).

I.D. from 1/2 "to 1"**MIXTURA SD/10 CSM**

CHEMICAL S&D CSM

MFA64110

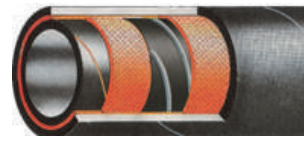


Highly corrosive chemical resistant black, CSM rubber tube, for suction and discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**MIXTURA D/10 XLPE**

ACID-SOLVENT & CHEMICAL DELIVERY - XLPE

MFA67110

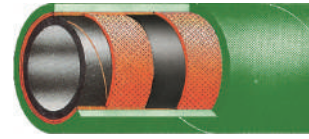

Chemicals, solvents, petroleum products & oil resistant translucent XLPE, for discharge wide range of chemicals, petroleum products. oils. high aromatic solvents, alcohol etc.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**MIXTURA SD/10 XLPE**

ACID-SOLVENT & CHEMICAL S&D - XLPE

MFA68110



Chemicals. solvents. petroleum products & oil resistant translucent XLPE, for suction and discharge wide range of chemicals, petroleum products. oils. high aromatic solvents, alcohol etc

I.D. from 3/4 "to 4" **W.P.** 10 BAR**MIXTURA FCSD /10 XLPE**

ACID-SOLVENT & CHEMICAL S&D - XLPE-FLAT CORRUGATED

MFA68F10



Chemicals, solvents. petroleum products & oil resistant translucent XLPE. for suction and discharge wide range of chemicals, petroleum products, oils, high aromatic solvents. alcohol etc.

I.D. from 3/4 "to 5" **W.P.** 10 BAR**MIXTURA D/16 XLPE**

ACID-SOLVENT & CHEMICAL DELIVERY - XLPE-EN 12115

MFA65516




Chemicals. solvents, petroleum products & oil resistant translucent XLPE. for discharge wide range of chemicals, petroleum products, oils. high aromatic solvents. alcohol etc.

I.D. from 3/4 "to 4" **W.P.** 16 BAR**MIXTURA SD/16 XLPE**

ACID-SOLVENT & CHEMICAL S&D - XLPE-EN 12115

MFA65616

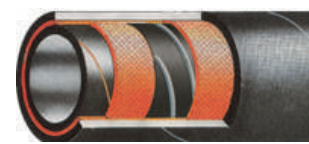


Chemicals. solvents, petroleum products & oil resistant translucent XLPE. for suction and discharge wide range of chemicals, petroleum products, oils, high aromatic solvents, alcohol etc.

I.D. from 3/4 "to 4" **W.P.** 16 BAR**MIXTURA SD/16 EPDM**

CHEMICAL S&D EPDM - EN 12115

MFA60216

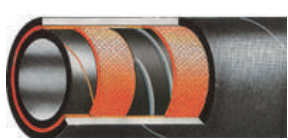

Chemical resistant black, EPDM rubber tube, for suction and discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 16 BAR**MIXTURA D/10 CSM**

CHEMICAL DELIVERY CSM

MFA63110




Highly corrosive chemical resistant black. CSM rubber tube, for discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**MIXTURA D/10 UHMW-PE**

ACID-SOLVENT & CHEMICAL DELIVERY - UHMW-PE

MFA60910

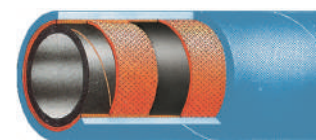


Translucent, food grade UHMW-PE liner suitable for wide range of corrosive chemicals and solvents, for discharge of all corrosive chemicals, especially high aromatic solvents.

I.D. from 3/4 "to 4" **W.P.** 10 BAR**MIXTURA SD/10 UHMW-PE**

ACID-SOLVENT & CHEMICAL S&D - UHMW-PE


MFA61010

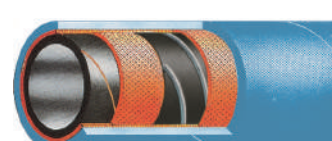

Translucent. food grade UHMW-PE liner suitable for wide range of corrosive chemicals and solvents. for suction and discharge of all corrosive chemicals, especially high aromatic solvents.

I.D. from 3/4 "to 4" **W.P.** 10 BAR

MIXTURA SDC/10 UHMW-PE ACID-SOLVENT & CHEMICAL S&D--UHMW-PE CORRUGATED

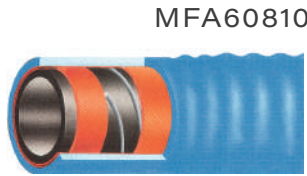

MFA60810 Chemical resistant black, EPDM rubber tube. for discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 10 BAR

MIXTURA D/16 UHMW-PE ACID-SOLVENT & CHEMICAL DELIVERY--UHMW-EN 12115



MFA65816 Chemical resistant black, EPDM rubber tube, for suction and discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 10 BAR

MIXTURA SD/16 UHMW-PE ACID-SOLVENT & CHEMICAL S&D--UHMW-PE-EN 12115



MFA65916 Chemical resistant black, EPDM rubber tube, for suction and discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 10 BAR

MIXTURA FLG-IN /10 CHEMICAL HOSE WITH BUILT-IN FLANGES



MFA62310 Chemical resistant black, EPDM rubber tube. for discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 16 BAR

MIXTURA FLG-BEN/10 CHEMICAL HOSE WITH RUBBER BEADED-END WITH FLANGE



MFA62210 Chemical resistant black, EPDM rubber tube, for suction and discharge wide range of chemicals.

I.D. from 3/4 "to 4" **W.P.** 16 BAR

F CABLE PROTECTION

ELINE PRT PE CABLE PROTECTION FOR ELECTRICAL WELDING



MPT13700 Rubberized synthetic textile, for cable protection in industrial applications and welding machines.

I.D. from 5/8 "to 2 1/4"


ELINE PRT FL CABLE PROTECTION FOR ELECTRICAL WELDING



MFL13700 Synthetic fullene with abrasion and weather resistant, black, non-conductive, synthetic rubber, for cable protection in industrial applications and welding machines.

I.D. from 14 mm "to 1 7/8"

ELINE PRT RAIL ELECTRICAL CABLE PROTECTION FOR TRAINS

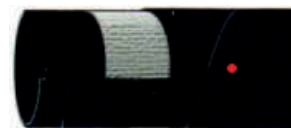

MRW13700 Black, non-conductive, synthetic rubber tube, for cable protection in industrial applications and railway.

I.D. from 13/32"to 3 1/8"

NEROM MINING CONDUIT HOSE (NON REINFORCED)



MPT03500 Flame resistant and non-conductive black CR tube, for electrical cable protection in mines and on mining equipment.

I.D. from 13/32 "to 3"

NEROM CORD MINING CONDUIT HOSE (REINFORCED)



MFA03500 Flame resistant and non-conductive black CR tube. for electrical cable protection in mines and on mining equipment.

I.D. from 1/2 "to 4"

NEROM GUARD INSULATING HOSE FOR CABLE



MFA85110 Insulating white EPDM rubber tube, to cool and protect electrical cables In steel mills and foundries.

I.D. from 1/2 "to 3" **W.P.** 10 BAR

F STEEL MILL HOSES

NEROPUL/10 CARBON BLOWER HOSE



MFA70110 Abrasion resistant, antistatic NR tube, for carbon blower applications in steel mills and foundries.

I.D. from 1 "to 3" **W.P.** 10 BAR

NEROPUL/ GF/7 GLASS FIBRE COVER WATER OUTSIDE TEMP. UP TO 600°C



MFA85507 Black natural and synthetic rubber tube, for cooling water transfer in steel mills and foundries.

I.D. from 3/8 "to 5" **W.P.** 7 BAR

STEELPULSE/10 NONFLAMMABLE-COOLING HOSE



MFA85510 Insulating grey EPDM rubber tube, for discharge of cooling water in very high ambient temperature, in steel mills, foundries etc.

I.D. from 3/8 "to 4" **W.P.** 10 BAR

STEELPULSE GF/10GLASS FIBRE COVER COOLING WATER
OUTSIDE TEMP. UP TO 600°C

MFA85710



Insulating white EPDM rubber tube, for discharge of cooling water in very high ambient temperature, In steel mills, foundries etc.

I.D. from 1/2 "to 4" **W.P.** 10 BAR**STEELPULSE 2GF/10**

2 GLASS FIBRE COVER COOLING WATER-OUTSIDE TEMP. UP TO 600°C

MFA85506



Insulating EPDM rubber tube, for cooling water systems of steel mills and foundries. resistant to heat and molten metal contact. Where a hose is working close to sources of heat (up to 600 °C).

I.D. from 4 "to 10" **W.P.** 6 BAR**STEELPULSE FLG/10**

2 GLASS FIBRE COVER COOLING WATER-OUTSIDE TEMP. UP TO 600°C

MFA12510



Insulating EPDM rubber tube, for cooling water systems of steel mills and foundries. resistant to heat and molten metal contact. Where a hose is working close to sources of heat (up to 600 °C).

I.D. from 4 "to 10" **W.P.** 10 BAR**FERCER/25**

CERAMIC COATED COVER HOT WATER

MFA11525



EPDM rubber tube, for transfer of water and hot water in industry, where a hose must be resistant to heat.

I.D. from 1/2 "to 4" **W.P.** 25 BAR**FERCER HOTLINE 600**

GLASS FIBRE COVER STEAM -OUTSIDE TEMP. UP TO 600 C


MFA52107



EPM rubber tube. resistant to saturated steam, for general saturated steam services at a maximum working pressure of 7 bar where a hose is working close to sources of heat (up to 600 °C).

I.D. from 1/2 "to 4" **W.P.** 7 BAR**NAUTIC MUT SW**

SOFT WALL BULK MATERIAL DELIVERY

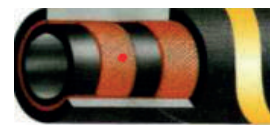MFA71514
MFA71510

High abrasion resistant antistatic NR tube, for discharge barite, bentonite and other abrasive materials.

I.D. from 3 " to 6"**NAUTIC MUT HW**

HARD WALL BULK MATERIAL SUCTION & DELIVERY

MFA72510



High abrasion resistant antistatic NR tube. for suction and discharge bante. bentonite and other abrasive materials.

I.D. from 4 "to 6" **W.P.** 10 BAR**NAUTIC LQMUT SW**

SOFT WALL LIQUID MUD DELIVERY

MFA73540



Black, special synthetic rubber tube, for discharge of high pressure liquid mud mineral oils etc.

I.D. from 3 " to 4" **W.P.** 10 BAR**NAUTIC LQMUT HW**

HARD WALL LIQUID MUD SUCTION & DELIVERY

MFA74540



Black, special synthetic rubber tube, for suction and discharge of high pressure liquid mud, mineral oils etc.

I.D. from 4 " to 5" **W.P.** 40 BAR**NAUTIC AQUA SW FDA**

SOFT WALL POTABLE WATER DELIVERY (F.D.A)

MFA83510
MFA83508

Red non-toxic, food quality, taste and odour free, NR tube, for discharge of potable water.

I.D. from 3 "to 6"**NAUTIC AQUA HW FDA**

HARD WALL POTABLE WATER S&D (F.D.A)

MFA84516




Red non-toxic, food quality, taste and odour free, NR tube, for suction and discharge of potable water.

I.D. from 3 " to 4" **W.P.****NAUTIC CHEM SW SD XLPE**

HARD WALL CHEMICAL SUCTION & DELIVERY- XLPE

MFA68510

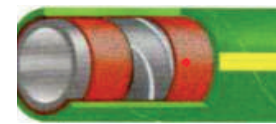

Chemicals, solvents, petroleum products & oil resistant translucent XLPE, for suction and discharge wide range of chemicals, petroleum products, oils, solvents, alcohol etc.

I.D. from 3 "to 4" **W.P.****NAUTIC CHEM HW SD UHMW-PE**

HARD WALL CHEMICAL SUCTION & DELIVERY-UHMW-PE

MFA61016



Translucent, food grade UHMW-PE, for suction and discharge of all corrosive chemicals, solvents.

I.D. from 3 "to 4" **W.P.** 16 BAR**OFFSHORE****NAUTIC OIL SW**

SOFT WALL OIL / FUEL DELIVERY

MFA22510
MFA22507

Black, fuel and oil resistant NBA tube, for discharge of heavy duty petroleum products up to 50% aromatic content.

I.D. from 3 "to 6"**NAUTIC OIL HW**

HARD WALL OIL / FUEL SUCTION & DELIVERY

MFA45516
MFA45510


Black, fuel and oil resistant NBA tube, for suction and discharge of heavy duty petroleum products up to 50% aromatic content.

I.D. from 3 " to 8"




• **Hydraulic Hoses**

• **PVC Hoses**

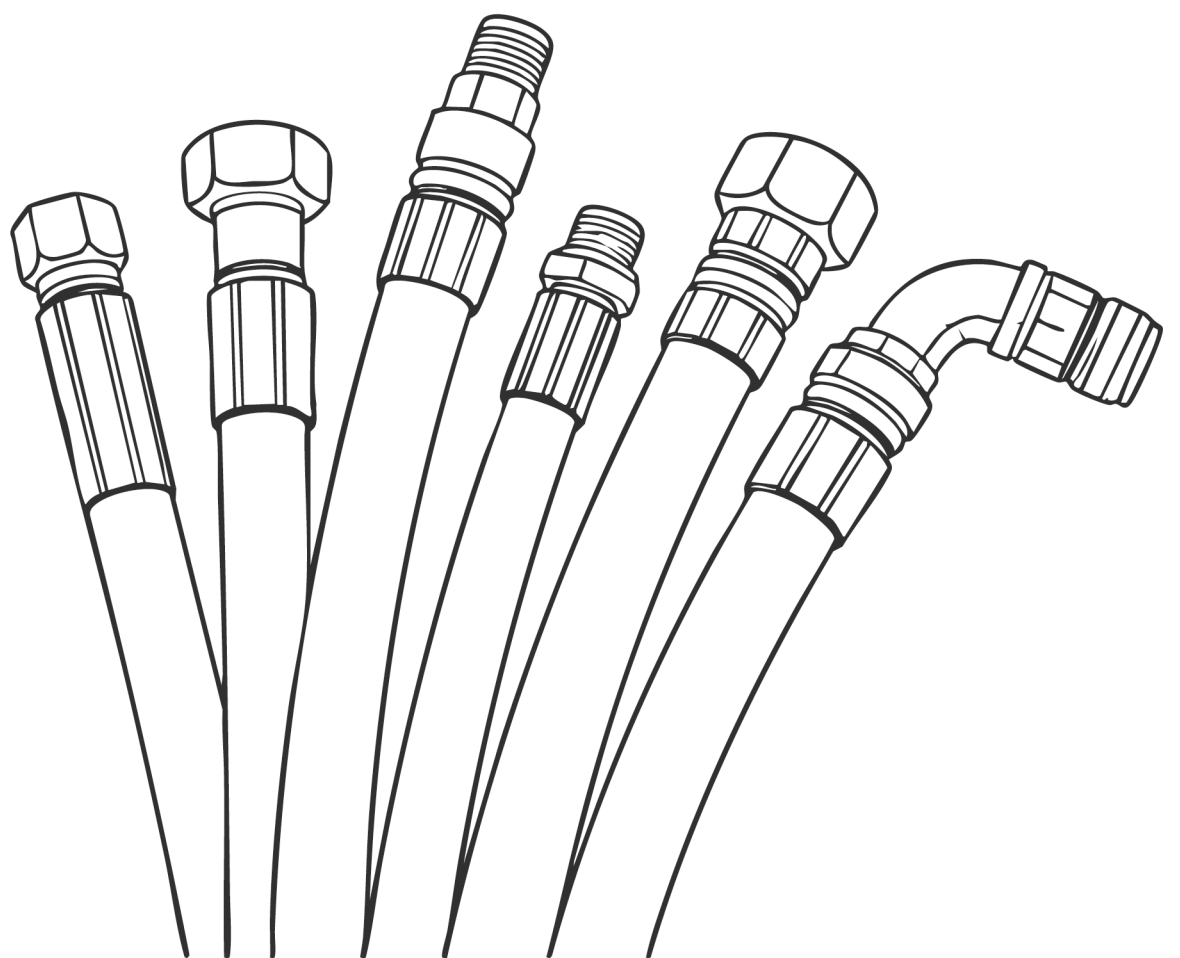

F HYDRAULIC HOSES


HYDRONORM 1A SAE 100 R1 A/DIN-EN 853 1 ST/STEEL WIRE BRAIDED

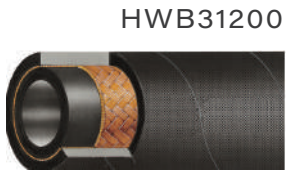

HWB31200 Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for low -medium pressure hydraulic systems in industry and agriculture.

I.D. from 3/16 "to 2"

HYDRONORM 1AT SAE 100 R1 A/DIN-EN 853 1 ST/STEEL WIRE BRAIDED

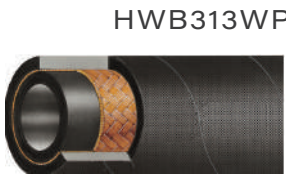

HWB313WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for low • medium pressure hydraulic systems 1n industry and agriculture.

I.D. from 3/16 "to 3"

HYDRONORM 2A SAE 100 R2 A/DIN-EN 853 2 ST/STEEL WIRE BRAIDED



HWB322WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube. for medium -high pressure hydraulic systems in industry and agriculture.

I.D. from 3/4 "to 4"


HYDRONORM 2AT SAE 100 R2 AT/DIN-EN 853 2 SN/STEEL WIRE BRAIDED



HWB323WP Mineral, vegetable, and hydraulic Oil resistant spec~ synthetic rubber tube, for medium -high pressure hydraulic systems in industry and agriculture

I.D. from 3/16 "to 3"


HYDRONORM STAINLESS+316 2 AT 2 STAINLESS STEEL WIRE BRAID

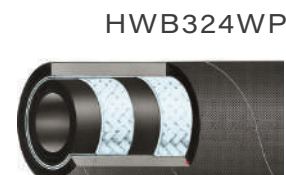

HWB324WP Mineral, vegetable and hydraulic oil resistant special synthetic rubber tube, for med,um-high pressure hydraulic systems in industry, offshore and submarine applications

I.D. from 3/16 "to 1"

HYDRONORM 1 SC DIN-EN 857 1 SC / STEEL WIRE BRAIDED

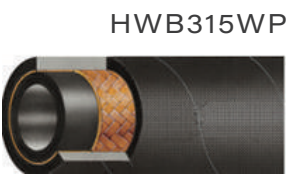

HWB315WP Mineral, vegetable, and hydraulic oil resistant spec~ synthetic rubber tube, for low -medium pressure hydraulic systems using hydraulic oils. mineral and vegetable lubricants.

I.D. from 1/4 "to 1"

HYDRONORM TW 1SC DIN-EN 857 1 SC / 1 STEEL WIRE BRAID



HWB315WP Mineral, vegetable, and hydraulic oil resistant spec~ synthetic rubber tube, for low -medium pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"


HYDRONORM 2 SC DIN-EN 857 2 SC / STEEL WIRE BRAIDED



HWB325WP Mine'al, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium -high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubncants.

I.D. from 1/4" to 1/2 "


HYDRONORM TW 2SC DIN-EN 857 2 SC / STEEL WIRE BRAIDED

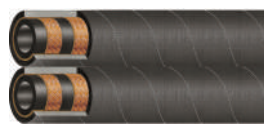

Mineral, vegetable, and hydraulic oil resistant spec~ synthetic rubber tube, for medium -high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1/2"


HYDROPERFORMANCE 1K EXCEED EN 857 1SC / STEEL WIRE BRAID

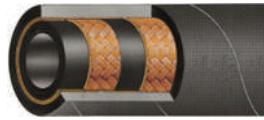

Mireral, vegetable, and hydraulic oil resistant spec~ synthetic rubber tube, for high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"


HYDROPERFORMANCE 2K EXCEED EN 857 2SC / STEEL WIRE BRAID

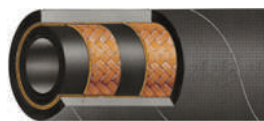

Mireral, vegetable, and hydraulic oil resistant spec~ synthetic rubber tube, for high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"


HYDROULTRA 1K EXCEED EN 857 1SC / STEEL WIRE BRAID

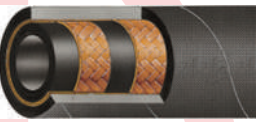

Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube. for high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants .

I.D. from 1/4 "to 1"

HYDROULTRA 2K EXCEED EN 857 2SC / STEEL WIRE BRAID

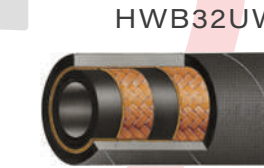

HWB32UWP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube. for high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants .

I.D. from 1/4 "to 1"


HYDROSTRONG 2K HIGH OZONE RESISTANCE 2 STEEL WIRE BRAID



HWB325WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium -high pressure hydraulic systems using hydraulic oils. mineral and vegetable lubricants.

I.D. from 1/4 "to 1"

FOREST 3WB 3 STEEL WIRE BRAID

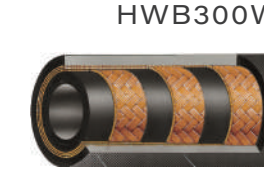

HWB300WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for high pressure hydraulic systems in industry and agnculture.

I.D. from 3/8 "to 1 1/4 "

HYDROEXTRA 2 SAE 100 R 16 / 2 STEEL WIRE BRAID



HWB32BWP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube. for medium -high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants

I.D. from 1/4 "to 1"

HYDROEXTRA 2S SAE 100 R 16S / 2 STEEL WIRE BRAID



HWB32BWP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium - high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"

HYDRONORM R17 SAE 100 R17 / STEEL WIRE BRAIDED



HWB31C21
HWB32C21 Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium pressure hydraulic systems in industry and agriculture.

I.D. from 1/4 "to 1" **W.P.** 210 BAR

HYDRONORM R5 SAE 100 R5 / STEEL WIRE BRAIDED



HWB351WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for low -medium pressure hydraulic systems in industry and agriculture.

I.D. from 3/16 "to 3"

HYDROECO 1WB 1 STEEL WIRE BRAID



HWB31TWP Hydraulic oil resistant special synthetic rubber tube, for low -medium pressure hydraulic systems in special usage for agriculture.

I.D. from 3/16 "to 1"

HYDROSTEER PILOT LINE HOSE



HWB31PWP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for pilot lines and hydraulic systems.

I.D. from 3/16 "to 1/2" **W.P.** 120 BAR

LIFTNORM JACK HOSE



HWB32069
HWB32369 Mineral, vegetable, and hydraulic oil resistant, special synthetic rubber tube, for high pressure hydraulic systems in jacking applications.

I.D. from 1/4" and 3/8" **W.P.** 690 BAR

HYDRILIFT ELEVATOR HOSE



HWB31L10
HWB32L10 Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for elevators-lifts and hydraulic systems.

I.D. from 3/4 "to 2" **W.P.** 100 BAR

MAGMA 1SN DIN-EN 853 1SN (+135°C) / HIGH TEMP. STEEL WIRE BRAIDED



HWB313WP High temperature hydraulic oil resistant special synthetic rubber tube, for low - medium pressure hydraulic systems in industry and mining where operating temperatures up to 150°C

I.D. from 3/16 "to 3"

MAGMA 2SN DIN-EN 853 2SN (+135°C) / HIGH TEMP. STEEL WIRE BRAIDED



HWB323WP High temperature hydraulic oil resistant special synthetic rubber tube, for medium - high pressure hydraulic systems in industry and mining where operating temperatures up to 150°C

I.D. from 3/16" to 3

MAGMA R5 SAE 100 R5 (+135°C) / HIGH TEMP. TEXTILE AND STEEL WIRE BRAIDED



HWB351WP High temperature hydraulic oil resistant special synthetic rubber tube, for low - medium pressure hydraulic systems in industry and mining where operating temperatures up to 150°C

I.D. from 3/16 "to 3"


MAGMA R6 SAE 100 R6 (+135°C) / HIGH TEMP. TEXTILE BRAIDED



BTB362WP High temperature hydraulic oil resistant special synthetic rubber tube, for high pressure hydraulic control lines where operating temperatures up to 150°C

I.D. from 3/16 "to 1"

MAGMA R4 SAE 100 R4 (+135°C) / HIGH TEMP. TEXTILE BRAIDED

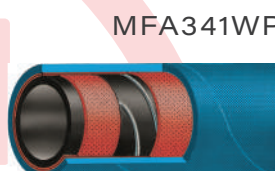

MFA341WP High temperature hydraulic oil resistant special synthetic rubber tube, for oil return lines of hydraulic systems where operating temperatures up to 150°C

I.D. from 3/4 "to 4"

HYDRONORM POLE 1SN DIN-EN 853 1SN (-50°C) / LOW TEMP. STEEL WIRE BRAIDED



HWB313WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for low - medium pressure hydraulic systems in industry and agriculture in extremely low temperatures.

I.D. from 3/16 "to 3"

HYDRONORM POLE 2SN DIN-EN 853 2SN (-50°C) / LOW TEMP. STEEL WIRE BRAIDED



HWB323WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium - high pressure hydraulic systems in industry and agriculture in extremely low temperatures.

I.D. from 3/16 "to 3"

HYDRONORM POLE FOREST 3WB 3 STEEL WIRE BRAID LOW TEMPERATURE -50°C



HWB300WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for high pressure hydraulic systems in industry and agriculture in extremely low temperatures.

I.D. from 3/8 "to 1 1/4 "

HYDROCLEAN 1W HYDRO-WASH




HWB31A25
HWB31025 150°C hot water and detergent solutions resistant special synthetic rubber tube, for medium pressure cleaning applications with hot water.

I.D. from 1/4 "to 1/2"

HYDROCLEAN 2W

HYDRO-WASH

HWB32A40
HWB32040

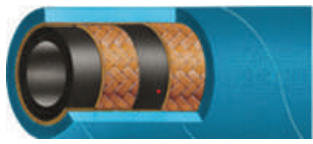


150°C hot water and detergent solutions resistant special synthetic rubber tube, for high pressure cleaning applications with hot water.

I.D. from 1/4 "to 1/2"

COCO

ANIMAL FAT

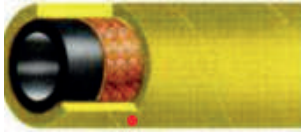

150°C hot water and detergent solutions resistant special synthetic rubber tube, for medium pressure cleaning in slaughterhouses.

I.D. from 3/8 "and 1/2" W.P. 208 BAR

HYDROCLEAN 4000

HIGH PRESSURE HYDRO - WASH

HWB34427



150°C hot water and detergent solutions resistant special synthetic rubber tube, for high pressure cleaning applications with hot water.

I.D. from 1/4 "to 1/2" W.P. 276 BAR

HYDROCLEAN 600

VERY HIGH PRESSURE
HYDRO - WASH

HWB34660




150°C hot water and detergent solutions resistant special synthetic rubber tube, for high pressure cleaning applications with hot water.

I.D. from 1/4 "to 1/2" W.P. 600 BAR

HYDROSPIR 4SP

EN 856 4 SP / MULTISPIRAL

HWS391WP

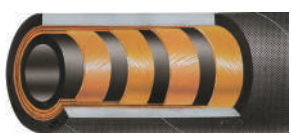


Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 1/4 "to 1"

HYDROSPIR 4SP+

EXCEED EN 856 4 SP /
MULTISPIRAL

HWS3P1EP

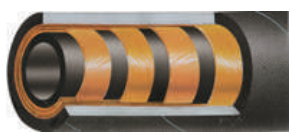

Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 1/4 "to 1"

HYDROSPIR 4SH

EN 856 4 SH / MULTISPIRAL

HWS392WP



Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 5/8 "to 2"

HYDROSPIR 4SH+

EXCEED EN 856 4 SH /
MULTISPIRAL

HWS3P2EP



Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 5/8 "to 2"

HYDROSPIR R12+

EXCEED SAE 100 R12 /
DIN-EN 856 R12 / MULTISPIRAL

HWS393EP



Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions and industrial applications.

I.D. from 3/8 "to 2"

HYDROSPIR - X 4K

X-FLEXIBILITY /
MULTISPIRAL

HWS39528



Mineral, vegetable and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions with high flexibility.

I.D. from 3/8" to 1 1/4" W.P. 280 BAR

HYDROSPIR - X 5K

X-FLEXIBILITY /
MULTISPIRAL

HWS39935




Mineral, vegetable and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions with high flexibility.

I.D. from 3/8" to 1 1/4" W.P. 350 BAR

HYDROSPIR - X 6K

X-FLEXIBILITY /
MULTISPIRAL

HWS39A42

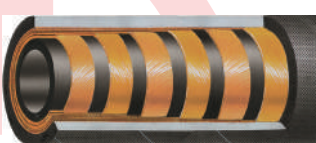

Mineral, vegetable and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions with high flexibility.

I.D. from 3/8 "to 1 W.P. 420 BAR

HYDROSPIR R13

EN 856 R13, SAE 100 R13 / 4 OR 6
WIRES MULTISPIRAL

HWS39734



Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/4 "to 2" W.P. 345 BAR

HYDROSPIR R13+

EXCEED EN 856 R13, SAE 100 R13
/ 4 OR 6 WIRES MULTISPIRAL

HWS3P7EP




Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/4 "to 2" W.P. 350 BAR

HYDROSPIR R15

EN 856 R15, SAE 100 R15 / 4 OR
6 WIRES MULTISPIRAL

HWS39842

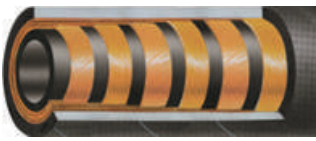

Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/8 "to 1 1/2" W.P. 420 BAR

HYDROSPIR R15+

EXCEED EN 856 R15, SAE 100 R15
/ 4 OR 6 WIRES MULTISPIRAL

HWS3P8EP



Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/8 "to 2" W.P. 420 BAR

HYDROSPIR STORM

6 WIRES MULTISPIRAL



HWS39TWP Mineral, vegetable. and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions, off-shore, drilling. mining etc.

I.D. from 3/4 "to 3"**FLEXIONBLAST 4-6**

WATERBLAST




HWS394WP
HWS396WP Mineral, vegetable, hydraulic oils and glycol basis fluids resistant special synthetic rubber tube, for water scaling and Jetting systems.

I.D. from 1/4 " to 1"**FLEXIONBLAST 4+**

WATERBLAST



HWS3P4WP Mineral, vegetable, hydraulic oils and glycol basis fluids resistant special synthetic rubber tube, for water scaling and Jetting systems.

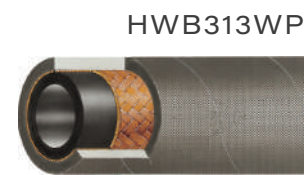I.D. from 1/4 "to 3/4"**ABRAMASTER 1SN**DIN EN 853 1 SN / X-ABRASION
STEEL WIRE BRAIDED

HWB313WP Mineral, vegetable. and hydraulic oil resistant special synthetic rubber tube, for low -medium pressure hydraulic systems in industry and agriculture.

I.D. from 3/16 "to 3"**ABRAMASTER 2SN**DIN EN 853 2 SN / X-ABRASION
STEEL WIRE BRAIDED

HWB323WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium -high pressure hydraulic systems in industry and agriculture.

I.D. from 3/16 "to 3"**ABRAMASTER 4SP**EN 856 4 SP / X-ABRASION /
MULTISPIRAL


HWS3S1WP Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 1/4 "to 1"**ABRAMASTER 4SH**EN 856 4 SH / X-ABRASION /
MULTISPIRAL

HWS3S2WP Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 5/8 "to 2"**ABRAMASTER R12+**EXCEED SAE 100 R12 / DIN- EN 856
R12/ X-ABRASION/ MULTISPIRAL


HWS3S3EP Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

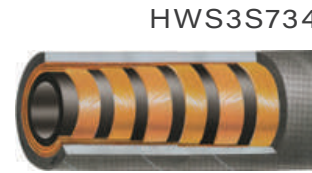I.D. from 3/8 "to 2"**ABRAMASTER R13**EN 856 R13, SAE 100 R13 / X-ABRASION
4 OR 6 WIRES MULTISPIRAL

HWS3S734 Mineral, vegetable. and glycol based hydraulic Oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/4 "to 2"**ABRAMASTER R15**EN 856 R15, SAE 100 R15 / X-ABRASION
4 OR 6 WIRES MULTISPIRAL

HWS3S842 Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube. for hydraulic systems with high peak pressures and arduous operating conditions.

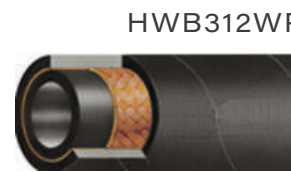I.D. from 3/8" to 1 1/2 " **W.P.** 420 BAR**HYDROSHIELD 1ST**SAR 100 R1 A / DIN-EN 853 1 ST
/ 1 STEEL WIRE BRAID HARC

HWB312WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for low - medium pressure hydraulic systems in industry and agriculture.

I.D. from 3/16" to 2"**HYDROSHIELD 1SN**SAE 100 R1 A / DIN-EN 853 1 SN
/ STEEL WIRE BRAID HARC

HWB313WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for low -medium pressure hydraulic systems in industry and agriculture.

I.D. from 3/16 "to 3"**HYDROSHIELD 2ST**SAE 100 R2 A / DIN-EN 853 2 ST /
2 STEEL WIRE BRAID HARC

HWB322WP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium - high press hydraulic systems in industry and agriculture

I.D. from 3/16 "to 2"**HYDROSHIELD 2SN**SAE 100 R2 A / DIN-EN 853 2 SN /
2 STEEL WIRE BRAID HARC

HWB323WP Mineral, vegetable and hydraulic oil resistant special synthetic rubber tube. for medium -high pressure hydraulic systems in industry and agriculture.

I.D. from 3/16 "to 3"**HYDROSHIELD 1SC**DIN-EN 857 1 SC
1 STEEL WIRE BRAID HARC

HWB315WP Mineral, vegetable and hydraulic oil resistant special synthetic rubber tube, for low -medium pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"**HYDROSHIELD 2SC**DIN-EN 857 2 SC
2 STEEL WIRE BRAID HARC

HWB325WP Mineral, vegetable and hydraulic oil resistant special synthetic rubber tube, for medium -high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"

HYDROSHIELD EXTRA 2 SAE 100 R16/ 2 STEEL WIRE BRAID HARC



HWB32BWP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium-high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 "to 1"

SAE 100 R16S / 2 STEEL WIRE BRAID HARC



Mineral, vegetable, and hydraulic Oil resistant special synthetic rubber tube, for medium-high pressure hydraulic systems using hydraulic oils, mineral and vegetable lubricants.

I.D. from 1/4 " to 1"

HYDROSHIELD R17 SAE 100 R17 / 1-2 STEEL WIRE BRAID HARC



HWB31CWP
HWB32CWP Mineral, vegetable, and hydraulic oil resistant special synthetic rubber tube, for medium pressure hydraulic systems in industry and agriculture.

I.D. from 1/4 "to 1"

HYDROSHIELD 4 SP EN 856 4SP/ SAE 100 R9R 4 STEEL WIRE SPIRAL HARC



HWS3A1WP Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 1/4 "to 1"

HYDROSHIELD 4 SP+ EXCEED EN 856 4SP / 4 STEEL WIRE SPIRAL HARC



HWS3P1EP Mineral, vegetable and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 1/4 "to 2"

HYDROSHIELD 4 SH EN 856 4SH / 4 STEEL WIRE SPIRAL HARC



HWS3A2WP Mineral, vegetable, and glycol based hydraulic Oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 5/8 "to 2"

HYDROSHIELD 4 SH+ EXCEED EN 856 4SH 4 STEEL WIRE SPIRAL HARC



HWS3P2EP Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 5/8 "to 2"

HYDROSHIELD R12+ EXCEED SAE 100 R12 / DIN- EN 856 R12/ X-ABRASION/ MULTISPIRAL



HWS3P3EP Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/8 "to 2"

HYDROSHIELD R13 EN 856 R13/SAE 100 R13/ 4-6 STEEL WIRE SPIRAL HARC



HWS3A734 Mineral, vegetable, and glycol based hydraulic Oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/4 "to 2"


HYDROSHIELD R15 EN 856 R15/SAE 100 R15/4-6 STEEL WIRE SPIRAL HARC



HWS3A842 Mineral, vegetable, and glycol based hydraulic oil resistant special synthetic rubber tube, for hydraulic systems with high peak pressures and arduous operating conditions.

I.D. from 3/8" to 1 1/2 "

HYDROTEXT R4 TEXTILE BRAID R4

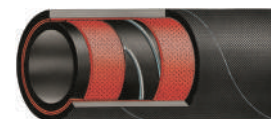

MFA34100 Hydraulic oil resistant special NBR tube, in oil return lines of hydraulic systems of industrial and agricultural applications.

I.D. from 3/4" to 4"


HYDROTEXT R4 ECO TEXTILE BRAID R4E



MFA34E00 Hydraulic oil resistant special synthetic rubber tube, in oil return lines of hydraulic systems of industrial and agricultural applications.

I.D. from 3/4 "to 4"


HYDROTEXT R4-FX X FLEXIBILITY TEXTILE BRAID R4 X

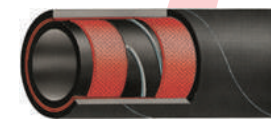

MFA34F00 Hydraulic oil resistant special NBR tube, in oil return lines of hydraulic systems of industrial and agricultural applications.

I.D. from 3/4"to 4"


HYDROTEXT R6 SAE 100 R6 EN 854 TYPE R6 TEXTILE BRAIDED

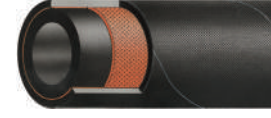

BTB36200 Hydraulic oil resistant special synthetic rubber tube, for hydraulic control lines, discharge under low pressure of hydraulic fluids, fuel, grease air and water.

I.D. from 3/16 "to 1"

HYDROTEXT R3 SAE 100 R3/ EN 854 TYPE R3 TEXTILE BRAIDED

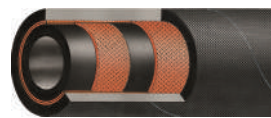

BTB33200 Hydraulic oil resistant special synthetic rubber tube, for hydraulic control lines, discharge under medium pressure of hydraulic fluids, fuel, grease air and water.

I.D. from 1/16 "to 1 1/2"

HYDROTEXT 1TE EN 854 TYPE 1 TE/ 20021 1 TE TEXTILE BRAIDED



BTB36400 Hydraulic oil resistant special synthetic rubber tube, for hydraulic control lines, discharge under low pressure of hydraulic fluids, fuel, grease, air and water.

I.D. from 3/16 "to 1"

HYDROTEXT 2TE

EN 854 TYPE 2 TE / DIN 20021 2 TE / TEXTILE BRAIDED

BTB36700




Hydraulic oil resistant special synthetic rubber tube, for hydraulic control lines, discharge under low pressure of hydraulic fluids. fuel. grease, air and water.

I.D. from 3/16 "to 1 1/2"

HYDROTEXT 3TE

EN 854 TYPE 3 TE / DIN 20021 3 TE / TEXTILE BRAIDED

BTB33400

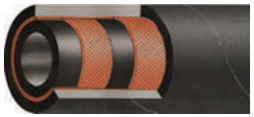

Hydraulic oil resistant special synthetic rubber tube for hydraulic control lines, discharge under medium pressure of hydraulic fluids, fuel. grease, air and water.

I.D. from 3/16 " to 3 15/16"

FITTFIX 90

PUSH ON / PUSH LOCK

BTB36P17




Hydraulic oil resistant special synthetic rubber tube, for hydraulic control lines, discharge under low pressure of hydraulic fluids, fuel. grease, air and water.

I.D. from 3/16 "to 1"

FITTFIX 140

PUSH ON / PUSH LOCK
HIGH TEMP (+135°C)

BTB36P17

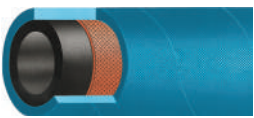

High temperature hydraulic oil resistant special synthetic rubber for hydraulic control lines, discharge under low pressure of hydraulic fluids, fuel, grease, air and water.

I.D. from 3/16 "to 1"

FLEXION AIRCON A

SAE J 2064 TYPE A CLASS 1 A/C REFRIGERANT HOSE

BTB29135



Special butyl rubber tube, for the transfer of R134A gas and liquid, in air conditioning systems for automotive industry.

I.D. from 5/16 "to 5/8" **W.P.** 35 BAR

FLEXION AIRCON B

SAE J 2064 TYPE B CLASS 1 A/C REFRIGERANT HOSE

HWB29335




Special butyl rubber tube, for the transfer of R134A gas and liquid, in air conditioning systems for automotive industry

I.D. from 3/16 "to 1 1/8" **W.P.** 35 BAR

AUTOAIRCON 2064B

SAE J 2196 BARRIER LAYERED SERVICE A/C REFRIGERANT HOSE

BTB29052

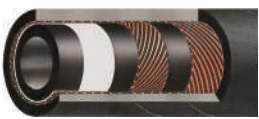

Smooth. special synthetic rubber tube, for the transfer of R134A-R404-R410 gas and liquid, in air conditioning systems for automotive industry.

I.D. from 5.7. mm **W.P.** 52 BAR

AUTOAIRCON 2064C

SAE J 2064 TYPE C BARRIER LAYERED A/C REFRIGERANT HOSE

CTS29035
BTB29035



Smooth, special synthetic rubber tube. for the transfer of R134A-R404-R410 gas and liquid, in air conditioning systems for automotive industry.

I.D. from 5/16 "to 5/8" **W.P.** 35 BAR

FLEXION BRAKE 1401

SAE J 1401 HYDRAULIC BRAKE

BTB38127




Hydraulic brake fluid resistant special synthetic rubber tube, in automotive hydraulic brake systems.

I.D. 1/8 "to 3/16" **W.P.** 276 BAR

FLEXION BRAKE 1402

SAE J 1402 / DIN 74310 AIR BRAKE

BTB37221
CTS37510

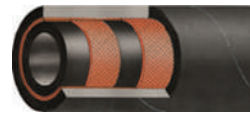


Special synthetic rubber tube, for used in automotive air brake systems.

I.D. from 3/8" to 5/8" **W.P.** 10 and 20.7 BAR

FLEXION BRAKE 188

SAE J 188 / 189 POWER STEERING HOSE

BTB33511
BTB33617

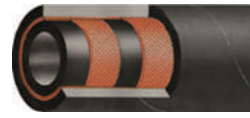

Hydraulic oil resistant special synthetic rubber tube, for power steering hose in passenger cars or light trucks.

I.D. 3/8" **W.P.** 17 and 103 BAR



THERMOPLASTIC HOSES

FXTHERMO MD

POLYESTER BRAIDED THERMOPLASTIC HOSE

STB140WP
STB141WP




High flexibility in hydraulic and pneumatic systems and medium duty conditions, polyester tube that is convenient to mineral and vegetable oil, polyurethane cover, one polyester textile braided. resistant to very low temperatures

I.D. from 1/8 "to 1"

FXTHERMO HD

POLYESTER BRAIDED EN 855 R7

STB150WP
STB151WP

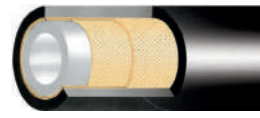

High flexibility in hydraulic and pneumatic systems and medium duty conditions, polyester tube that is convenient to mineral and vegetable oil, polyurethane cover, two polyester textile braided, resistant to very low temperatures.

I.D. from 1/8 "to 1"

FXAR-1

ARAMID REINFORCED THERMOPLASTIC HOSE

STB240WP
STB241WP




High flexibility in hydraulic and pneumatic systems and medium duty conditions. polyester tube that is convenient to mineral and vegetable oil, polyurethane cover, one aramid reinforced, resistant to very low temperatures.

I.D. from 1/8 "to 1"

FXAR-2

ARAMID REINFORCED EN 855 R8

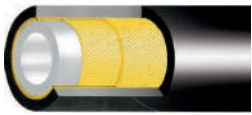STB250WP
STB251WP

High flexibility in hydraulic and pneumatic systems and medium duty conditions, polyester tube that is convenient to mineral and vegetable oil, polyurethane cover. two aramids reinforced, resistant to very low temperatures.

I.D. from 1/8" to 1"**FXAR-ST**

ARAMID AND STEEL WIRE REINFORCED FLEX

STB260WP
STB261WP

High flexibility in hydraulic and pneumatic systems and medium duty conditions, polyester tube that is convenient to mineral and vegetable oil, polyurethane cover, one aramid and one steel wire reinforced, resistant to very low temperatures.

I.D. from 1/8" to 1"**FXSTEEL-1**

STEEL WIRE REINFORCED FLEX HYDRAULIC

SWB310WP
SWB311WP

High flexibility in hydraulic and pneumatic systems and medium duty conditions, polyester tube that is convenient to mineral and vegetable oil, polyurethane cover, one steel wire reinforced, resistant to very low temperatures.

I.D. from 1/8" to 1"**FXSTEEL-2**

STEEL WIRE REINFORCED FLEX HYDRAULIC

SWB315WP
SWB316WP

High flexibility in hydraulic and pneumatic systems and medium duty conditions, polyester tube that is convenient to mineral and vegetable oil, polyurethane cover, two steel wires reinforced, resistant to very low temperatures.

I.D. from 1/8" to 1"**FXPAINT MD**

THERMOPLASTIC FLEX SOLVENT MEDIUM DUTY

STB410WP
STB411WP

Medium pressure solvent and paint applications, polyamide tube resistant to solvents, paints and hydraulic oils; polyurethane cover resistant to oil abrasion and weather. One polyester textile reinforced, resistant to very low temperatures.

I.D. from 1/8" to 1"**FXPAINT HD**

THERMOPLASTIC FLEX SOLVENT HEAVY DUTY EN 855 R7

STB420WP
STB421WP

High pressure solvent and paint applications, polyamide tube resistant to solvents, paints and hydraulic oils, polyurethane cover resistant to oil, abrasion and weather. Two polyester textiles reinforced, resistant to very low temperatures.

I.D. from 1/8" to 1"**FXPAINT AR-1**

ARAMID BRAIDED THERMOPLASTIC PAINTHOSE

STB450WP
STB451WP

Solvents, paints and hydraulic oil resistant polyamide tube for high pressure water based fluids. solvents, paints and hydraulic systems.

I.D. from 1/8" to 1"**FXPAINT AR-2**

SAE 100 R8 / ARAMID BRAIDED THERMOPLASTIC PAINT

STB470WP
STB471WP

Solvents, paints and hydraulic oil resistant polyamide tube for high pressure water based fluids, solvents, paints and hydraulic systems.

I.D. from 1/8" to 1"**FXPAINT ST-1**

STEEL WIRE BRAIDED THERMOPLASTIC

SWB312WP
SWB313WP

Solvents, paints and hydraulic oil resistant polyamide tube for high pressure water based fluids, solvents, paints and hydraulic systems.

I.D. from 1/8" to 1"**FXPAINT ST-2**

STEEL WIRE BRAIDED THERMOPLASTIC

SWB322WP
SWB323WP

Solvents, paints and hydraulic oil resistant polyamide tube for high pressure water based fluids, solvents, paints and hydraulic systems.

I.D. from 1/8" to 1"**FXGREASE HOSE**


THERMOPLASTIC TEXTILE GREASE OIL



Grease oil resistant polyester tube for high pressure lubricant systems.

I.D. 5/32" and 1/4"**PROSPIR**

THERMOPLASTIC SPIRAL GUARD

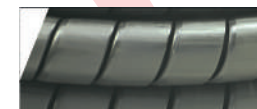

Protection spiral for hose and cable.

I.D. from 5/16" to 4"**FXTWIN**

ALL THERMOPLASTIC HOSES



The twin and multiple hoses are available upon request.

I.D. from 1/8" to 1"**PVC HOSES****DION**

VERY LIGHT DUTY WATER DELIVERY



Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for light duty delivery of water light chemicals, in agricultural, industrial applications, constructions and sanitary uses.

I.D. from 5/8" to 2"**EUROPA SLW**

SUPER LIGHT DUTY WATER DELIVERY

TIH110WP




Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for light duty delivery of water, light chemicals, in agricultural, industrial applications and constructions.

I.D. from 3/4" to 4"

EUROPA LW

LIGHT DUTY WATER DELIVERY

TIH111WP

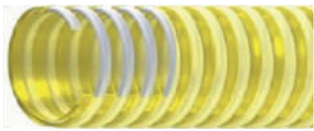


Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for light duty delivery of water, light chemicals, in agricultural, industrial applications and constructions.

I.D. from 3/4 "to 8"**EUROPA ST**

STANDARD DUTY WATER DELIVERY

TIH112WP

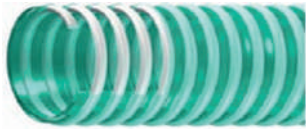

Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for irrigation, delivery of water, fertilizers, insecticides, acids, detergents, solutions etc.

I.D. from 3/4 "to 8"**KUYEM**

AIR CONDITION

TIH115WP



Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for discharge of water from air conditioning systems.

I.D. from 16 mm to 22 mm**MARS MW**

MEDIUM DUTY SUCTION & DELIVERY

TIH116WP



Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications and constructions.

I.D. from 3/4 "to 8"**MARS HW**

HEAVY DUTY SUCTION & DELIVERY

TIH117WP



Strong, flexible and smooth plasticized PVC with shock resistant PVC spiral, for heavy duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications and constructions.

I.D. from 3/4 "to 8"**PAMUKKALE**

SPA-BATH

TIHWP



Strong, flexible and smooth white plasticized PVC with shock resistant PVC spiral, for high pressure passage of warm water in swimming pools, jacuzzis etc.

I.D. from 15 mm to 55 mm"**DIANA ST-FX**

STANDARD DUTY WATER DELIVERY (S.E.)

TIHWP



Strong, flexible and smooth special super elastic material with shock resistant PVC spiral, for irrigation delivery of water, various light chemicals, waste matter, light slurries, sand and gravel etc. For use in cold climates.

I.D. from 3/4 "to 8"**HERA FX**

MEDIUM DUTY SUCTION & DELIVERY (S.E.)

TIHWP



High temperature hydraulic oil resistant special synthetic rubber tube, for low - medium pressure hydraulic systems in industry and mining where operating temperatures up to 150°C

I.D. from 3/4 "to 8"**HERA FX/C**

MEDIUM DUTY S&D .E. - CORRUGATED

TIHWP



Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in cold climates.

I.D. from 3/4 "to 8"**IGLO**

MEDIUM DUTY S&D (S.E.) (30°C)



Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in very cold climates.

I.D. from 3/4 "to 8"**IGLO/LC**

MEDIUM DUTY S&D S.E. - LIGHT CORRUGATED (-30°C)



Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in very cold climates.

I.D. from 3/4 "to 8"**IGLO/C**

MEDIUM DUTY S&D (S.E.) CORRUGATED (-30°C)



Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in very cold climates.

I.D. from 3/4 "to 8"**HIEMES**

MEDIUM DUTY S&D (S.E.) (-40°C)



Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in very cold climates

I.D. from 3/4 "to 8"**HIEMES/LC**


MEDIUM DUTY S&D S.E. - LIGHT CORRUGATED (-40°C)



Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in very cold climates.

I.D. from 3/4 "to 8"**HIEMES/C**

MEDIUM DUTY S&D S.E. - CORRUGATED (-40°C)

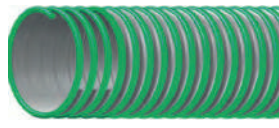

Strong, flexible and smooth special superelastic material with shock resistant PVC spiral, for medium duty suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications, constructions, sewer purging, sludge, slurries, waste matter, sand and gravel etc. especially for use in very cold climates.

I.D. from 3/4 "to 8 "**DEMETER HD-PU**

HEAVY DUTY ANTIABRASIVE SUCT & DELIVERY



Strong, flexible plasticized pvc with antlabrasive polyurethane tube with shock resistant PVC spiral, for suet and del. of water, slurries, dust and gravel etc. in abrasive applications.

I.D. from 40mm to 6"

DEMETER HD

MEDIUM DUTY OIL
SUCTION & DELIVERY



TIHWP

Strong, flexible and smooth oil resistant PVC/ NBR compound with shock resistant PVC spiral, for medium duty suction and delivery of industrial oils and fuels.

I.D. from 3/4 "to 6"

HESTIA MW-FX

MEDIUM DUTY OIL
SUCTION & DELIVERY (S.E.)




TIHWP

Strong, flexible and smooth oil resistant PVC/ NBR compound with shock resistant PVC spiral, for medium duty suction and delivery of industrial oils and fuels. For use in cold climates.

I.D. from 3/4 "to 6"

HESTIA HW-FX

HEAVY DUTY OIL S&D (S.E.) -
ANTISTATIC

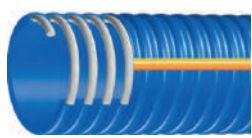

TIHWP

Strong, flexible and smooth oil resistant PVC/ NBR compound with shock resistant PVC spiral, for heavy duty suction and delivery of industrial oils and fuels. For use in cold climates.

I.D. from 3/4 "to 8"

ATHENA ST

STANDARD DUTY NON-TOXIC
DELIVERY



TIHWP

Strong, flexible and smooth non-toxic, plasticized PVC with shock resistant PVC spiral, for delivery of water, mineral water, milk, fruit juices, alimentary liquids etc.

I.D. from 3/4 "to 8"

ATHENA MW

MEDIUM DUTY NON-TOXIC
DELIVERY



TIHWP

Strong, flexible and smooth non-toxic, plasticized PVC with shock resistant PVC spiral for delivery of water, mineral water, milk, fruit juices, alimentary liquids etc.

I.D. from 3/4 "to 8"

ARTEMIS ST

STANDARD DUTY WINE DELIVERY



TIHWP

Strong, flexible and smooth non-toxic, plasticized PVC with shock resistant PVC spiral for delivery of mineral waters, fruit juices, wines, liqueurs up to 15% alcohol contents alimentary liquids etc.

I.D. from 3/4" to 6"

ARTEMIS MW

STANDARD DUTY WINE DELIVERY



TIHWP

Strong, flexible and smooth non-toxic, plasticized PVC with shock resistant PVC spiral for delivery of mineral waters, fruit juices, wines, liqueurs up to 15% alcohol contents alimentary liquids etc.

I.D. from 3/4" to 8"

STEELPLAST

NON-TOXIC STEEL SPIRAL



TIHWP

Strong, very flexible and smooth non-toxic, transparent plasticized PVC with shock resistant galvanized spiral, for suction and delivery of water, mineral water, fruit juices, liquids etc. in shipyards, industries, buildings, agricultural and industrial machineries.

I.D. from 5/16 "to 6"

STEELPLAST +

NON-TOXIC STEEL
SPIRAL-CLOSE PITCH




TIHWP

Strong, very flexible and smooth non-toxic, transparent plasticized PVC with shock resistant galvanized spiral, for suction and delivery of water, mineral water, fruit juices, liquids etc. in shipyards, industries, buildings, agricultural and industrial machineries.

I.D. from 5/16 "to 6"

STEELPLAST BR

STEEL & TEXTILE REINFORCED

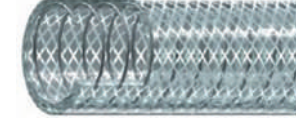

TWT45

Strong, very flexible and smooth non-toxic, transparent plasticized PVC with shock resistant galvanized spiral and high tensile synthetic textile, for suction and delivery of water, mineral water, fruit juices, liquids etc. in shipyards, industries, buildings, agricultural and industrial machineries.

I.D. from 3/4" to 2" **W.P.** 45 BAR

STEELPLAST-SPA

SANITARY HOSE



TIWWP

Strong, very flexible and smooth, white plasticized PVC with shock resistant galvanized steel spiral wire, for suction and discharge for sanitary installation in marine and domestic use with low odour permeability.

I.D. from 3/8 "to 6"

MINERVA LW

LIGHT DUTY VENTILATION



TIH00

Extremely light and flexible plasticized PVC with shock resistant PVC spiral, for light duty application of industrial ventilation and airflow systems, suction of dust, air, gases, powders, liquids etc.

I.D. from 3/4 "to 8"

MINERVA ST

STANDARD DUTY VENTILATION



TIH00

Extremely light and flexible plasticized PVC with shock resistant PVC spiral, for industrial ventilation and airflow systems, suction of dust, air, gases, powders, liquids etc.

I.D. from 3/4 "to 10"

KYBELE MW

MEDIUM DUTY VENTILATION




TIH00

Extremely light and flexible plasticized PVC with shock resistant PVC spiral, for industrial ventilation and airflow systems, suction of dust, air, gases, powders, liquids etc.

I.D. from 3/4 "to 10"

SHANGO

SELF-EXTINGUISHING GAS
PIPE SHEATH

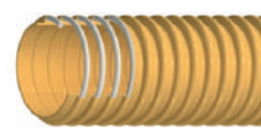

TIH00

Self-extinguishing, strong, flexible and very smooth plasticized PVC with shock resistant PVC spiral, for protection and insulation of gas pipes.

I.D. from 10 mm to 60mm

TERRALINE S

SUPER LIGHT DUTY FLAT
DELIVERY



TLSWP


Flexible PVC lube, for light duty discharge of water in agriculture and industry.

I.D. from 1 1/2 "to 4"

TERRALINE SL

LIGHT DUTY FLAT DELIVERY

TLSWP

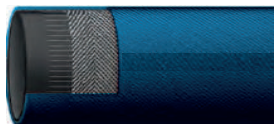

Flexible PVC tube, for light duty discharge of water in agriculture and industry.

I.D. from 1 1/4 "to 6"**TERRALINE L**

STANDART DUTY FLAT DELIVERY

TLSWP



Flexible PVC tube, for standart duty discharge of water, lighl chemicals and other liquids in agriculture and industry.

I.D. from 1 1/4 "to 8" **W.P.** 10 and 14 BAR**TERRALINE M**

MEDIUM DUTY FLAT DELIVERY

TLSWP



Flexible PVC/NBR tube, for medium duty discharge of water, light chemicals and other liquids in agriculture and industry.

I.D. from 20 mm to 8**TERRALINE H**

HEAVY DUTY FLAT DELIVERY

TLSWP



Flexible PVC/NBR tube, for heavy duty discharge of water, light chemicals and other liquids in agriculture and industry.

I.D. from 1 1/2 "to 8"**TERRALINE-MINE**

FLAME RESISTANT FLAT DELIVERY - MSHA IC-261/0

TLSWP




Flame resistant PVC/NBR tube, for flame resistani hose for dewatering in mines, quarries etc.

I.D. from 1 1/2 "to 2 1/2" **W.P.** 10 and 14 BAR**SUIJIN LW**

LIGHT DUTY NON-TOXIC PVC BRAIDED

TTSWP

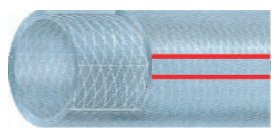


Non-toxic transparent PVC tube, for light duty conveying liquids, air, powdered foods, salts, light chemicals.

I.D. from 1/4" to 1"**SUIJIN ST**

NON-TOXIC PVC BRAIDED

TTSWP

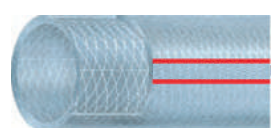


Non-toxic transparent PVC tube, for conveying liquids, air, powdered foods, salts, light chemicals.

I.D. from 1/4 "to 2"**SUIJIN HW-OIL**

HEAVY DUTY BRAIDED PVC OIL

TTSWP

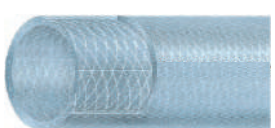


Transparent PVC tube, for heavy duty delivery of industrial oils and fuels.

I.D. from 5/32 "to 2"**SOFTLINE**

PVC BRAIDED TRANSPARENT

TTSWP

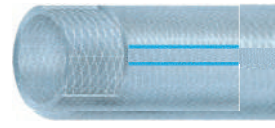


Transparent PVC tube, for gardening and general water discharge services.

I.D. from 1/4" to 2"**STAR**

PVC BRAIDED TRANSPARENT

TTSWP

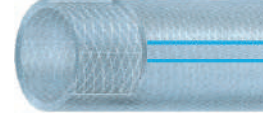


Transparent plasticized PVC tube. for gardening, irrigation and general water discharge.

I.D. from 3/8 "to 2"**MOON**

PVC WATERING

TTSWP

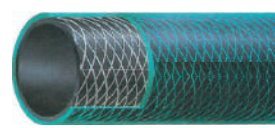

Black PVC compound tube, for gardening and general water discharge services.

I.D. from 1/4 "to 1 1/4"**VEMUS**

PVC GARDEN WATERING

TTSWP




Black PVC compound tube, for gardening and general water discharge services.

I.D. from 3/8 "to 1 1/4"**IBIZA**

GARDENING BLUE

TTSWP

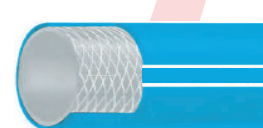


White plasticized PVC tube, for gardening, irrigation and general water discharge.

I.D. from 1/2 "to 2"**KAS**

GARDENING GREEN

TTSWP

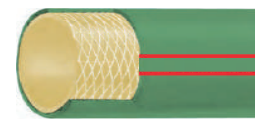


Yellow plasticized PVC tube, for gardening, irrigation and general water discharge.

I.D. from 1/2 "to 2"**SIDE**

GARDENING ORANGE

TTSWP




Yellow plasticized PVC tube, for gardening, irrigation and general water discharge.

I.D. from 1/2 "to 2"**GRIFTLINE**

GARDENING FLUORESCENT

TTSWP

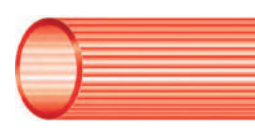

Very flexible plasticized PVC tube, for gardening, irrigation and general water discharge.

I.D. from 1/2 "to 1 1/2"

PURELINE

PVC TUBES



TPTWP

Very flexible and smooth transparent plasticized PVC tube, for conveying liquids, air, light chemicals, oils, detergents, and as level indicator in industries and machineries.

I.D. from 4 mm to 50**ANGORA**

THERMORUB LOW PRESSURE WATER



TTSWP

Special synthetic thermorub compound tube, for gardening and general water discharge services.

I.D. from 1/2" to 2" **W.P.** 7 BAR**ASPENDOS L**

AGRICULTURAL (SPRAY) 20-40 BAR

TTS236WP
TTS237WP

Special PVC compound tube resistant to pesticides and fertilizers, for spraying of pesticides and fertilizers in agriculture.

I.D. from 5/16" to 1" **W.P.** 20 and 40 BAR**ASPENDOS**

AGRICULTURAL SPRA 50-60-100 BAR

TTB23850
TTB23980
TTB24010

Special PVC compound tube resistant to pesticides and fertilizers, for spraying of pesticides and fertilizers in agriculture.

I.D. from 5/16" to 1/2" **W.P.** 50-80 and 100 BAR**KLAROS**

THERMORUB LIGHT DUTY AIR

TTS10
TTS20

Special oil mist resistant synthetic thermorub compound tube, for pneumatic equipments and tools.

I.D. from 1/4" to 2" **W.P.** 10 and 20 BAR**AIR BLOW**

THERMORUB LIGHT DUTY AIR



TTS10

Special thermorub compound tube, for pneumatic equipments in car service stations.

I.D. from 3/16" and 1/4" **W.P.** 10 BAR**MILET**

P U - PVC AIR



TTSWP

Black PU tube, for high performance transfer of air, oils and light chemicals.

I.D. from 1/4" to 1/2" **W.P.** 20 BAR**FUJI**

WELDING OXYGEN - ACETYLENE)




TTS20

Black smooth special thermorub compound tube resistant to oxygen and acetylen gases, for industrial welding.

I.D. from 1/4" to 1/2" **W.P.** 20 BAR**FUJI TWIN**

WELDING TWIN OXYGEN - ACETYLENE)

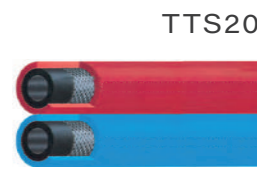

TTS20

Black smooth special thermorub compound tube, resistant to oxygen and acetylen gas for industrial welding.

I.D. from 1/4" to 1/2" **W.P.** 20 BAR**TORCH**

WELDING TORCH HOSE



TTS10

Red, blue or black plasticized PVC tube, for delivery of water and cooling liquids suitable for welding torches.

I.D. from 5/32" to 3/8" **W.P.** 10 BAR**REELMASTER PL**


THERMORUB FIRE REEL KIWA EN 694

TTB585WP
TTB59520

Special thermorub compound tube, for fighting applications in fire reels.

I.D. from 3/4" to 1 1/4"**LPGGAZ**

LPG. BUTANE-PROPANE HOSES (KITCHEN TYPE)

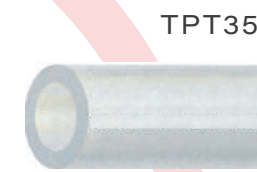


TPT35

Special PVC compound resistant to LPG, Butane/Propane, for convey LPG, Butane/Propane in domestic applications.

I.D. from 1/4" to 3/8"**LPGGAZ CC**

LPG. BUTANE-PROPANE HOSE EN 1763 TYPE 1,2,3

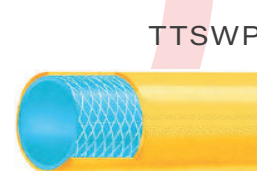

TTSWP

Special PVC compound resistant to LPG. Butane/Propane for to convey LPG, Butane/Propane in domestic applications.

I.D. 5/16" and 3/8" **W.P.** 20 BAR**PETROLINE**

FUEL (DIESEL DROP)




TTS20

Strong, flexible and smooth oil resistance PVC /NBR compound tube for delivery of industrial oils and fuels.

I.D. from 5/8" to 1 1/4" **W.P.** 20 BAR**PAKLINE**

WASHING MACHINE

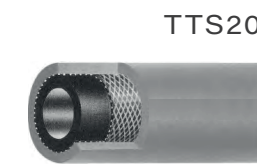

TTS20

Special thermorub compound tube, for water inlet connections of washing machines.

I.D. from 5/16" to 1/2" **W.P.** 20 BAR**HAMAM**

SHOWER HOSE




TTS10

White plasticized PVC tube, for water delivery in showers and baths.

I.D. 5/16" to 3/8" **W.P.** 10 BAR

Notes...



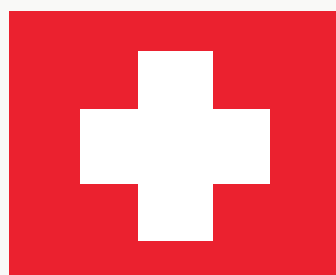

c/ o Gianni ochsner SA Ecocentro Serta Via Cantonale 2,
6814 Lamone, Switzerland

Tel...: +41 91 945 43 85

Cell: +41 79 596 55 52

info@flexion-industrial.ch

www.flexion-industrial.ch

